



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: H04N	A2	(11) International Publication Number: (43) International Publication Date:	WO 00/16544 23 March 2000 (23.03.2000)
--	-----------	--	--

(21) International Application Number: PCT/US98/26864

(22) International Filing Date: 16 December 1998 (16.12.1998)

(30) Priority Data:
09/154,069 16 September 1998 (16.09.1998) US(60) Parent Application or Grant
ACTV, INC. [/]; O. FREEMAN, Michael, J. [/]; O. HARPER,
Gregory, W. [/]; O. DEO, Frank, P. [/]; O. DOYLE, Scott, W. ;
O.

Published

(54) Title: COMPRESSED DIGITAL-DATA SEAMLESS VIDEO SWITCHING SYSTEM

(54) Titre: SYSTEME DE COMMUTATION VIDEO SANS SOLUTION DE CONTINUITE POUR DONNEES NUMERIQUES
COMPRIMEES

(57) Abstract

An interactive cable television system is disclosed which utilizes a standard cable television distribution network for simultaneously providing a plurality of viewers with an interactive television program comprising a plurality of signals related in time and content. Video signals are transmitted in a digital format, more than one signal being multiplexed onto a data stream on a single channel. The video signals may be compressed for efficiency. A receiver, in conjunction with a signal selector, selects a particular NTSC channel for playback, then selects a particular video signal from the data stream, and decompresses the video signal for playback. Seamless switching between video signals on different channels is provided. An alternative embodiment is disclosed wherein the various signals which comprise the interactive program are switched at the head end rather than at the receiver. The multiple choice control unit selects a desired signal by relaying the multiple choice selections of the user through a relay box back to a remotely located switching station. The switching station routes the correct video signal down the appropriate cable channel for the particular user.

(57) Abrégé

L'invention concerne un système interactif de télévision par câble utilisant un réseau de télédistribution par câble standard afin d'offrir simultanément à une pluralité de téléspectateurs un programme télévisé interactif comprenant une pluralité de signaux associés dans le temps et de par leur contenu. Les signaux vidéo sont émis sous forme numérique, plusieurs signaux étant multiplexés en un train de données sur un seul canal. A des fins d'efficacité, les signaux vidéo peuvent être comprimés. Un récepteur, en association avec un sélecteur de signaux, sélectionne un canal NTSC particulier pour la lecture, puis sélectionne un signal vidéo particulier du train de données, et décompresse le signal vidéo signal en vue de la lecture. On obtient ainsi une commutation sans solution de continuité entre les signaux vidéo de différents canaux. Selon un autre mode de réalisation, divers signaux comprenant le programme interactif sont commutés au niveau de la tête de réseau plutôt qu'au niveau du récepteur. Pour sélectionner un signal voulu, l'unité de commande à choix multiples retransmet, via un boîtier relais, les sélections à choix multiples de l'utilisateur à une station de commutation à distance. Cette station de commutation achemine le signal vidéo correct vers l'utilisateur par le canal câble approprié.

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: H04N		A2	(11) International Publication Number: WO 00/16544
			(43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/US98/26864		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 December 1998 (16.12.98)			
(30) Priority Data: 09/154,069 16 September 1998 (16.09.98) US			
(71) Applicant: ACTV, INC. [US/US]; Suite 2401, Rockefeller Center, 1270 Avenue of the Americas, New York, NY 10020 (US).			
(72) Inventors: FREEMAN, Michael, J.; 68 Blue Seas Lane, Kings Point, NY 11024 (US). HARPER, Gregory, W.; 410 East 50th Street, New York, NY 10022 (US). DEO, Frank, P.; 37 Sandhill Road, Kendall Park, NJ 08824 (US).			
(74) Agents: DOYLE, Scott, W. et al.; Dorsey & Whitney LLP, Suite 4400, 370 Seventeenth Street, Denver, CO 80202-5644 (US).		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: COMPRESSED DIGITAL-DATA SEAMLESS VIDEO SWITCHING SYSTEM

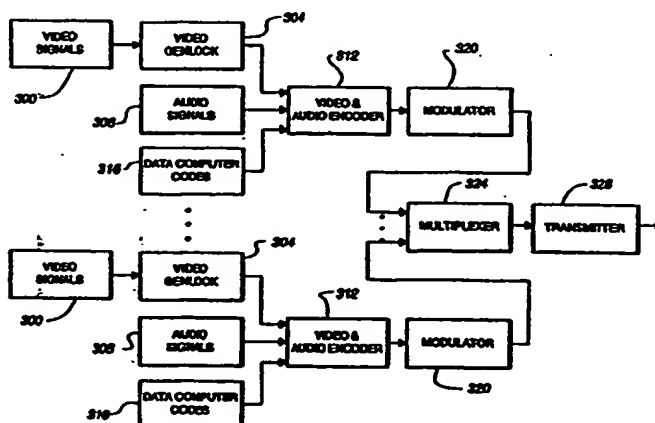

(57) Abstract

An interactive cable television system is disclosed which utilizes a standard cable television distribution network for simultaneously providing a plurality of viewers with an interactive television program comprising a plurality of signals related in time and content. Video signals are transmitted in a digital format, more than one signal being multiplexed onto a data stream on a single channel. The video signals may be compressed for efficiency. A receiver, in conjunction with a signal selector, selects a particular NTSC channel for playback, then selects a particular video signal from the data stream, and decompresses the video signal for playback. Seamless switching between video signals on different channels is provided. An alternative embodiment is disclosed wherein the various signals which comprise the interactive program are switched at the head end rather than at the receiver. The multiple choice control unit selects a desired signal by relaying the multiple choice selections of the user through a relay box back to a remotely located switching station. The switching station routes the correct video signal down the appropriate cable channel for the particular user.

【公報種別】特許法第17条の2の規定による補正の掲載
 【部門区分】第7部門第3区分
 【発行日】平成13年4月20日(2001. 4. 20)

【公開番号】特開平7-46198
 【公開日】平成7年2月14日(1995. 2. 14)
 【年通号数】公開特許公報7-462
 【出願番号】特願平5-190513
 【国際特許分類第7版】
 H04B 14/04

G11B 20/10 301
 H04J 3/22
 H04N 7/24

【F I】

H04B 14/04 Z
 B
 G11B 20/10 301 Z
 H04J 3/22
 H04N 7/13 Z

【手続補正書】

【提出日】平成12年3月3日(2000. 3. 3)

【手続補正1】

【補正対象書類名】明細書

【補正対象項目名】特許請求の範囲

【補正方法】変更

【補正内容】

【特許請求の範囲】

【請求項1】少なくとも圧縮された画像信号を複数チャネルについて受入れ、該複数チャネルのうち選択されたチャネルについて圧縮された画像信号をバッファメモリ手段において所定の遅延時間でバッファリングし、このバッファリングされた画像信号を復号する方法であって、新たに選択されたチャネルの画像信号を未使用状態のバッファメモリ手段にバッファリングし、該新たにバッファリングされている画像信号を復号し、選択前のチャネルの画像信号が蓄積されているバッファメモリ手段に蓄積された画像信号を無効化する復号方法。

【請求項2】少なくとも圧縮された画像信号を複数チャネルについて受入れ、該複数チャネルのうち選択されたチャネルについての圧縮された画像信号を出力する手段と、該選択出力手段から出力される画像信号を受け入れるように前記選択出力手段に作動的に接続され、所定の遅延時間をもって該画像信号をバッファリングする少なくとも2つの並列動作可能なバッファメモリ手段と、該バッファメモリ手段のいずれかに作動的に接続され、

該接続されたバッファメモリ手段に蓄積された画像信号を読み出して復号処理する少なくとも1つの復号手段と、前記バッファメモリ手段のうち、前記復号手段が作動的に接続されていないほうのいずれかのバッファメモリ手段に作動的に接続され、該接続されたバッファメモリ手段に蓄積された画像信号を無効化処理する少なくとも1つの疑似復号手段とを有する復号装置。

【請求項3】前記復号手段が1つ設けられ、前記疑似復号手段が、チャネル位置的に前記復号手段を挟んで前後に2つ設けられ、前記バッファメモリ手段が3つ設けられ、前記チャネル切換が順次連続的に行われ、前記復号手段に作動的に接続されるバッファメモリ手段に、前記選択出力手段から選択されたチャネルの画像信号が印加されて画像信号が蓄積され、前記復号手段は該画像信号が蓄積されているバッファメモリ手段に蓄積された画像信号を復号処理し、前記疑似復号手段のうちのチャネル選択に後行する位置の疑似復号手段がチャネル選択直前に画像信号が蓄積されていたバッファメモリ手段の画像信号を無効化する請求項2記載の復号装置。

【請求項4】少なくとも圧縮された画像信号を受入れ、圧縮された画像信号をバッファメモリ手段において所定の遅延時間でバッファリングし、このバッファリングされた画像信号を復号する方法であって、ブレーバックが要求されたとき、要求されたブレーバック時点からの画像信号を未使用状態のバッファメモリ手

段にバッファリングし、
該新たにバッファリングされている画像信号を復号し、
ブレイバック要求前の画像信号が蓄積されているバッファメモリ手段に蓄積されている画像信号を無効化する復号方法。

【請求項5】少なくとも圧縮された画像信号を受入れ、
所定の遅延時間をもって該画像信号をバッファリングする並列動作可能な少なくとも2つのバッファメモリ手段と、

該バッファメモリ手段のいずれかに作動的に接続され、
該接続されたバッファメモリ手段に蓄積された画像信号を読み出して復号処理する少なくとも1つの復号手段と、

前記バッファメモリ手段のうち、前記復号手段が作動的に接続されていないほうのいずれかのバッファメモリ手段に作動的に接続され、該接続されたバッファメモリ手段に蓄積された画像信号を無効化処理する少なくとも1つの疑似復号手段とを有し、

ブレイバックが要求されたとき、要求されたブレイバック時点からの画像信号を前記疑似復号手段に作動的に接続されているバッファメモリ手段にバッファリングし、
前記復号手段が該新たにバッファリングされている画像信号を復号し、

前記疑似復号手段がブレイバック要求前の画像信号が蓄積されているバッファメモリ手段に蓄積された画像信号を無効化する復号装置。

【手続補正2】

【補正対象書類名】明細書

【補正対象項目名】0033

【補正方法】変更

【補正内容】

【0033】チャンネル切換の場合について述べる。本発明の復号装置は、

少なくとも圧縮された画像信号を複数チャンネルについて受入れ、該複数チャンネルのうち選択されたチャンネルについての圧縮された画像信号を出力する手段と、該選択出力手段から出力される画像信号を受け入れるように前記選択出力手段に作動的に接続された、少なくとも2つの並列動作可能なバッファメモリ手段と、

該バッファメモリ手段のいずれかに作動的に接続され、
該接続されたバッファメモリ手段に蓄積された画像信号

を読み出して復号処理する少なくとも1つの復号手段と、

前記バッファメモリ手段のうち、前記復号手段が作動的に接続されていないほうのいずれかのバッファメモリ手段に作動的に接続され、該接続されたバッファメモリ手段に蓄積された画像信号を無効化処理する少なくとも1つの疑似復号手段とを有する。好適には、連続的なチャンネル切換に則して、前記復号手段が1つ設けられ、前記疑似復号手段が、チャンネル位置的に前記復号手段を挟んで前後に2つ設けられ、前記バッファメモリ手段が3つ設けられ、前記復号手段に作動的に接続されるバッファメモリ手段に、前記選択出力手段から選択されたチャンネルの画像信号が印加されて画像信号が蓄積され、前記復号手段は該画像信号が蓄積されているバッファメモリ手段に蓄積された画像信号を復号処理し、前記疑似復号手段のうちのチャンネル選択に後行する位置の疑似復号手段がチャンネル選択直前に画像信号が蓄積されていたバッファメモリ手段の画像信号を無効化する。

【手続補正3】

【補正対象書類名】明細書

【補正対象項目名】0034

【補正方法】変更

【補正内容】

【0034】ブレイバックの場合について述べる。本発明の復号装置は、少なくとも圧縮された画像信号を受入れる並列動作可能な少なくとも2つのバッファメモリ手段と、該バッファメモリ手段のいずれかに作動的に接続され、該接続されたバッファメモリ手段に蓄積された画像信号を読み出して復号処理する少なくとも1つの復号手段と、前記バッファメモリ手段のうち、前記復号手段が作動的に接続されていないほうのいずれかのバッファメモリ手段に作動的に接続され、該接続されたバッファメモリ手段に蓄積された画像信号を無効化処理する少なくとも1つの疑似復号手段とを有する。この復号装置において、ブレイバックが要求されたとき、要求されたブレイバック時点からの画像信号を前記疑似復号手段に作動的に接続されているバッファメモリ手段にバッファリングし、前記復号手段が該新たにバッファリングされている画像信号を復号し、前記疑似復号手段がブレイバック要求前の画像信号が蓄積されているバッファメモリ手段に蓄積された画像信号を無効化する。

COMPRESSED DIGITAL-DATA SEAMLESS VIDEO SWITCHING SYSTEM**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a continuation-in-part of application Serial Number 08/887,314, filed July 7, 1997, which is a continuation of application Serial Number 08/443,607, filed May 18, 1995, now U.S. Pat. No. 5,724,091, which is a continuation-in-part of application Serial Number 08/166,608, filed December 13, 1993, abandoned, which is a continuation of application Serial Number 07/797,298, filed November 25, 1991, abandoned.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

The present invention relates generally to interactive response systems, and more particularly to an interactive television system which provides interactive programming using compressed, digital data having more than one video signal on a broadcast channel, or a multiplexed signal within a digital format, or both.

The invention also relates to seamlessly switching between video signals while viewing a first video signal, even though the video signal switched to may be on a different broadcast channel, or on the same channel multiplexed with, the currently viewed video signal.

2. Description of the Prior Art

Interactive systems are well known in the art. By synchronizing parallel tracks of an information storage media, and relating the content of the various tracks, it was found that interactive activity could be simulated. For example, commonly owned Freeman, U.S. Patent No. 3,947,972 discloses the use of a time synchronized multi-track audio tape to store educational conversations. One track is employed to relay educational interrogatories to a user, and the remainder of the tracks, selectable by a switching mechanism, are used to convey responsive messages.

These systems progressed to interactive television, wherein multiple broadcast or cable channels were switched in response to user selections to provide interactive

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	ME	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

5 operation. Commonly owned Freeman, U.S. Patent No. 4,847,700 discloses an
interactive television system wherein a common video signal is synched to a plurality
of audio channels to provide content related to user selectable responses.

10 Commonly owned Freeman, U.S. Patent No. 4,264,925 discloses the use of a
5 conventional cable television system to develop an interactive system. Standard
television channels with time synchronized content are broadcast to a plurality of
users. Each user switches between channels responsive to interrogatories to provide
15 interactivity.

These systems have been tailored to include memory functions so that the
10 system can be more interactive, individually responsive, and so that customized
messages may be given to the various categories of users responsive to informational
20 queries. Freeman, U.S. Patent No. 4,602,279 discloses the use of a memory to store
demographic profiles of television viewers. This information is stored to be recalled
later for providing target specific advertising, for example. Prior art interactive
25 television systems were generally concerned with providing one signal (i.e. one video
signal) per channel, whether the channel is on cable television, broadcast television, or
a VCR. Because cable and broadcast television channel capacity is becoming limited
30 as more and more cable channels are being utilized for conventional programming,
and interactive systems of the type described require multiple channels, it is desirable
20 to reduce the channel capacity required for such systems while still providing at least
the same level of interactivity.

35 U.S. Patent No. 5,724,091 disclosed and claimed seamlessly switching
between video signals while viewing a first video signal, even though the video signal
switched to may be on a different broadcast channel, or on the same channel
40 multiplexed with, the currently viewed video signal. What is needed, however, is a
25 less complex method and system for seamlessly switching between compressed digital
video signals in a low cost digital set top environment.

45 SUMMARY OF THE INVENTION

The present invention is a digital cable television system which utilizes digital
30 video signals to provide customized viewing responsive to user selections. A
50 standard cable or direct broadcast satellite television distribution network is utilized

5 for transmitting interactive and other programming to users. The present invention
allows a plurality of viewers to be simultaneously provided with a plurality of
different digitally compressed program signals. Further, interactive programs
10 comprises a plurality of video signals.

5 The video signals are converted into digital format for transmission. In a
digital format, it is possible to transmit more than one video signal per cable
television channel. Further, it is possible to transmit video signals via conventional
15 telephone lines. If desired, the various digital video signals may be compressed
before transmission. Compression allows an even larger number of video signals to
10 be transmitted over a channel of the transmission media. Preferably, the compression
scheme used is one of the MPEG standard compression schemes, including MPEG2,
20 MPEG4 and MPEG7. The video signals are fed into a digital data and video format,
preferably in the MPEG format.

25 As part of the digital signal transmission, some of the signals are interactive
15 and individualized programming. Such enhanced content is created by utilizing
conventional video production techniques and by providing a multiplicity of video,
audio, graphics and data in any combination thereof. The multiple video and audio
30 information is time synchronized and, in most instances, preferably related in content.
The subsequent interactions at the remote sites are controlled by the end use and
20 producer, via the insertion of data codes representing a scripting language. These
codes are preferably integrated and sent with the interactive video and audio signals
35 and may be inserted either at a program control center or cable headend.

An multiplexer combines the various digital signals into a reduced number of
transmission data streams for transmission. The various NTSC television channels
40 25 may be allocated in a predetermined fashion to maximize the number of
simultaneously transmittable signals. The multiplexer in conjunction with the
television transmission system multiplexes the desired data streams onto the desired
45 channels, and transmits these signals over the NTSC channels. The number of video
signals which may be multiplexed onto a data stream on a single transmission channel
30 will vary depending on the video signals to be transmitted. The television channels
containing a data stream of multiplexed video signals may be transmitted over a
50

5 standard cable television distribution network, or direct broadcast satellite transmission system.

10 After encoding, compression, multiplexing and modulation, the program signals and interactive program signals are distributed by a transmission means including, but not limited to, satellite, cable television, fiber optics, public switched
5 telephone network, terrestrial broadcast, closed circuit, etc., where the modulation technique is defined by the means of transport. Additionally, the distributed content may include a signal conversion or retransmission prior to receipt by the end users.

15 The programs are received at an end user's location and connected to the appropriate reception device. Receptions devices, for example, may include, but are not limited to, cable television receivers/converters, satellite receivers, terrestrial
20 broadcast receivers, personal computers, etc.. The receiver receives one or more television channels, some or all containing a multiplexed data stream of video signals or non-multiplexed digital video signals, and in conjunction with a signal selector, selects a particular data channel/ data stream for playback, then selects a particular
25 video signal from the data stream's multiplexed signal, and finally expands the video signal, if necessary, for playback to a television monitor.

30 The signal selector may comprise a controller and software, for example, in a digital set top box. The controller and software in a digital set top box operate to control the receiver and signal selector to select a particular digital video signal.
20

35 A user inputs responses preferably via a standard remote device. The user may be simply changing from one digital channel to another or providing responses to an interactive program. In the interactive program embodiment, the user selectably responds to information displays or interrogatory messages and the signal selector
40 selects a particular multiplexed video signal and de-multiplexes, expands and displays the selected video signal. Alternatively, the signal selector may select a video signal based on personal profile information stored in memory.
25

45 If more signals are needed for an interactive program than were mappable to a data stream on a single channel, the signal selector in conjunction with the receiver is
30 programmed to switch between the various video signals within a multiplexed data stream as well as between data streams among the various broadcast channels to provide the necessary level of interactivity.
50

5 The various information segments in the various video signals preferably
relate in real-time and content so that an interactive conversation can occur as the
video signal is played back and the user responds to the various interrogatories on the
10 video signals. The use of multiple signals per channel may be used for many types of
5 interactive programs, including those disclosed in the previously mentioned U.S.
Patents, for example, field synchronized multiple camera angles from a sporting
event, or an interactive game show. However, the present invention also covers the
15 use of various video signals not related in real-time and content.

10 In a two-way embodiment, the various signals which comprise the interactive
program may be switched at the head end rather than at the receiver. This
20 embodiment may be used in a cable television system, a direct broadcast satellite
system, a conventional telephone system modified to receive digital video signals, or
any other appropriate transmission system capable of sending digital video signals.
The multiple choice control unit, rather than the hand-held multiple choice controller,
25 15 selects a desired video signal by relaying the multiple choice selections of the user
through a relay box back to a remotely located switching station, preferably the cable
television source. The multiple choice selections may be relayed to the switching
station in any conventional means, such as two-way cable television, telephone, or FM
30 transmission. If the interactive programming is being transmitted over a telephone
20 line, the multiple choice selections may be relayed back over the same telephone line.
The switching station receives the multiple choice selection of the user and routes the
35 correct signal down the appropriate cable channel, telephone line, or other
transmission media for the particular user. In such an arrangement, only a single link
is required between the subscriber or receiver and the head end so that the one channel
40 25 link can be used to receive a plurality of different channel selections dependent on the
interactive choice relayed from the receiver to the video switch at the head end.

45 If desired, the two-way link may be used for other purposes, such as to
transmit user demographic data back to the programming source for commercial
reasons, or to allow an interactive game show player to win prizes, for example.

30 Once a signal is demodulated, the digital data stream is demultiplexed into its
constituent elements such as video, audio graphics and data. The demultiplexed
50 digital data stream is directed to the appropriate decode devices, i.e., video to video

5 decoder, audio to audio decoder, graphics to display driver and control data to applications software.

10 In the interactive program embodiments, the application software reads the data and processes the scripting language. Further, the interactive application software processes input from the end user. Based upon a combination of inputs, it then decides upon the appropriate action. The viewing experience is then enhanced, based upon the individualization of the content by switching among the video, audio, graphical and data elements.

15 The system of the present invention allows improved performance during switching, making the channel switches transparent. Virtual channel applications for enhanced programming and addressable advertising will need to enable frequent switching among multiple MPEG video streams. When a channel change is required by a user response to an interactive interlude, a slight imperceptible delay is programmed to allow the expansion algorithm an opportunity to adjust to the rapid change from one video signal to another.

20 During the delay, previously obtained video information is displayed while the interactive system locates, receives, demultiplexes, decompresses, decodes, and processes the new video signal. This allows the interactive system to switch to the new video signal without flicker or distortion appearing on the TV screen, i.e., a seamless switch.

25 Disclosed are different methods to achieve this seamless switching. One involves an analog video frame buffer. Another uses two tuners. Other alternatives include: (a) using two digital video buffers; (b) using a large memory; (c) using a large buffer in an embodiment similar to that of (b); and (d) switching at the cable headend.

30 The present invention includes a preferred improved method and system for seamless switching between MPEG compressed digital signals in a digital set top, HDTV or personal computer environment. While the MPEG standard discusses the use of splice points, such points are difficult to insert in video streams that come from different sources, which is the typical cable television environment. This is because streams that have been compressed at separate times may have different clocks and therefore different timing information. By making some modifications on the encode

WO 00/16544

process for the virtual channel applications, novel enhancements can be made to splicing. Such enhancements of the present invention include locking the time bases of the multiple channel encoders, genlocking the video sources, time synchronizing the start of the encode process, and inserting splice points at the appropriate locations in the GOP. The present invention utilizing these constraints and others for various virtual channel applications has the significant advantage of requiring virtually no hardware changes to most conventional digital set top converters.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram of the Interactive Television System of the present invention.

FIGURE 2 is a block diagram of the system of the present invention in a two-way transmission configuration.

FIGURE 3 is a block diagram of one embodiment to achieve seamless switching between video signals.

FIGURE 4 is a block diagram showing an alternative embodiment to achieve seamless switching between video signals.

FIGURE 5 is a block diagram of an embodiment of a central programming location.

FIGURE 6 is a block diagram showing video splice points and time gaps in the video programming streams.

FIGURE 7 is block diagram of an alternative embodiment of a reception box.

FIGURE 8 is a block diagram of alternative audio frames.

FIGURE 9 is a block diagram of a TV broadcast station switcher.

FIGURE 10 is a block diagram of an embodiment for Non-related Program Switching.

FIGURE 11 is a block diagram of an embodiment for Switching within Multiple Event Programming.

FIGURE 12 is a block diagram of an embodiment for Seamless Picture-in-Picture Program Switching.

FIGURE 13 is a block diagram of an embodiment for Switching within Multiple Commerce/Shopping Programming.

FIGURE 14 is a block diagram of an embodiment for Digital Program Insertion — Addressable Advertising.

FIGURE 15 is a block diagram of an embodiment for Seamless Switching from a Group of Signals to Other Signals at a Server.

FIGURES 16A and 16B are block diagrams of an alternative Two-Tuner Embodiment.

FIGURE 17 is a block diagram of an alternative Two-Tuner Embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is an interactive television system in which a plurality of viewers are simultaneously provided with a plurality of different program information message signals. A plurality of video signals 1 are provided. Video signals 1 may be, for example, various field and/or audio synchronized camera angles of a sporting event, or a game show having a content and host acting responsively to user selections. Alternatively, video signals 1 may be any video signals suitable for interactive conversation, such as those described in U.S. Patent Nos. 4,847,700, 3,947,972, 4,602,279, 4,264,925, or 4,264,924, the contents of which are incorporated specifically herein by reference. Various types of time and content related video signals exist which are suitable for interactive operation.

In previous systems, these various signals would be transmitted to a receiver on separate broadcast or cable channels, each requiring a separate 6 MHZ NTSC channel. According to the present invention, video signals 1 are directed to analog-to-digital ("A/D") convertors 2 which convert the various video signals into digital format for transmission. A/D convertors 2 may be of any conventional type for converting analog signals to digital format. An A/D convertor may not be needed for each video signal 1, but rather fewer convertors, or even a single convertor are capable of digitizing various video signals 1. Interactive video programs may also be delivered to a cable or other distribution network in pre-digitized and/or precompressed format.

Digital conversion results in very large amounts of data. It may therefore be desirable to reduce the amount of data to be sent, allowing more signals to be sent

5 over a single transmission channel. For example, a single frame of digitized NTSC
video represents over 350 Kbytes of data. Therefore, two hours of standard video is
about 80 Gbytes. Since there are 30 frames/sec in such video, the data transfer rate is
10 22 Mbytes/sec. This large amount of data is preferably reduced by digital
5 compression.

In order to reduce the data transfer requirements, the various digital video
signals are preferably compressed before transmission. The video may be compressed
15 by any conventional compression algorithm, the two most common types being
"processor intensive" and "memory intensive."

10 The processor intensive approach performs compression by eliminating non-
changing aspects of a picture from the processing in the frame-to-frame transfer of
information, and through other manipulations of picture information involving
20 mathematical computations that determine the degree to which a given motion in a
picture is perceptible to the human eye. This approach depends on high-speed
25 processing power at the transmission point.

15 The memory approach involves division of a picture frame into hundreds of
minuscule blocks of pixels, where each block is given a code representing its set of
30 colors and variations in luminance. The code, which is a much smaller increment of
information than all the information that would describe a given block of the picture,
20 is transmitted to the receiver. There, it calls up the identically coded block from a
library of blocks stored in the memory of the receiver.

35 Thus, the bit stream represents a much smaller portion of the picture
information in this approach. This system is generally limited by the variety of
picture blocks which may be stored in the receiver, which relates directly to memory
40 size and microprocessor power.

25 Examples of commonly known compression techniques which may be used
with the invention are JPEG, MPEG1 and MPEG2.

45 Data Compressors 3 are provided to reduce the data for each video signal
which must be transmitted. Data compressors 3 may be of any conventional type
30 commonly known in the art for compressing video images, such as those previously
described. Compression of the various video signals might be done with fewer data
50 compressors 3 than one compressor per video signal. In a conventional analog NTSC

5 system, by way of example, it is customary to transmit one video signal per 6 MHZ
channel. By digitizing the video signal, it is possible to send a data stream containing
more than one video signal in one channel. Compressing the digitized signals, allows
10 even more video signals to be transmitted over a single transmission channel. The
5 number of signals which may be sent over a single channel is generally related to, for
example, a) the type of video being sent; b) the video compression scheme in use; c)
the processor used and memory power; and d) the bandwidth of the transmission
15 channel.

Compression techniques exploit the fact that in moving images there is very
10 little change from frame-to-frame. Editing out the redundancies between frames and
coding just the changes allows much higher compression rates. The type of video
20 which normally contains a great deal of high-speed movement, such as occurs at live
sporting events, will, therefore, have the lowest compression rates. Movies, on the
other hand, which normally have a lower frame rate and less frame-to-frame change
25 than a live sporting event will achieve higher compression rates. Currently,
15 commonly known compression schemes have compression rates that vary from 2:1 to
10:1 for satellites, and 2:1 to 5:1 for cable television systems, depending on the degree
30 of motion.

Once the various video signals 1 have been digitized and compressed,
20 multiplexer 4 combines the various digital signals into a reduced number of
transmission data streams for transmission. For example, if 68 NTSC channels are
35 available, and each channel is capable of transmitting either 4 digitized, compressed
slow moving video signals (e.g. movies) or 2 digitized, compressed, high-speed video
signals (e.g. sports), then the various NTSC channels should be allocated in a
40 predetermined fashion to maximize the number of simultaneously transmittable
25 signals.

As an example, the broadcast frequency corresponding to a first NTSC
45 channel may contain a data stream of separate digitally compressed non-interactive
movies. On this frequency, the data stream would contain video signals representing
30 a number of movies. However, the video signals, unlike those of an interactive
program, are not related in time and content. The frequency corresponding to a
50 second channel might contain a digital data stream of an interactive sports program,

WO 00/16544

5 consisting of two multiplexed compressed high-speed video signals that are preferably
related in time and content. The frequency corresponding to a third channel might
10 contain a digital data stream of an interactive movie consisting of four multiplexed
compressed video signals which are related in time and content. The frequency
5 corresponding to a fourth channel might contain an analog NTSC signal relating to
local programming. Therefore, using the invention, four NTSC channels could
15 contain a channel of multiplexed movies, an interactive sports program, an interactive
movie, and local programming.

Multiplexer 4 receives the incoming compressed, digitized video signals and
10 in a predetermined conventional fashion, in conjunction with transmitter 5,
20 multiplexes the desired video signal onto the desired channels, and transmits these
signals over the NTSC channels. Certain NTSC channels may contain only one video
or other signal, in analog or digital form.

As indicated earlier, the number of video signals which may be multiplexed
25 onto a data stream on a single transmission channel will vary. Also, the number of
15 channels which use data streams may vary. The transmission data streams are
transmitted by transmitter 4 via transmission media 6 to a receiving station 7. The
30 transmitter 4, media 6, and receiver 7 may be any conventional means for transmitting
digital video signals including broadcast television, cable television, direct broadcast
20 satellite, fiber optic, or any other transmission means. Alternatively, the invention
may be self-contained in a stand-alone system, as explained below.

The transmission means may also be a telephone system transmitting a digital
35 video data stream. Thus, a multiplexed data stream containing several broadcast
video channels or an interactive program with related video signals may be sent directly to a
40 25 user over a single telephone line. The aforementioned digital transmission devices
may include means for transmitting analog signals as well.

In one of the preferred embodiments, the digital transmission signal is
45 transmitted using a cable television system. Receiver 7 receives various NTSC
channels, some or all containing multiplexed or non-multiplexed digital video signals.
30 Ordinarily, more than one channel will be transmitted by transmitter 5 and received by
receiver 7 as in an ordinary cable television system. However, each of the different
50 channels may have a data stream containing several digitized video signals thereon.

5 Therefore, receiver 7 preferably operates in conjunction with signal selector 8 to select a particular NTSC channel for playback, then to select a particular video signal from the data stream's multiplexed signal, and finally to uncompress or expand the compressed video signal, if necessary for playback to monitor 10.

10 Multiple choice controller 9 operates to control receiver 7 and signal selector 8 to select a particular video signal for playback. In practice, a user need not know that multiple signals per channel are in use. If, for example, 68 channels with 4 signals-per-channel were in use, controller 9, in conjunction with receiver 7 and signal selector 8 might be programmed to represent these channels to the user as channels 1-2-72. Monitor 10 may be, for example, a conventional television. Signal selector 8 preferably includes a conventional de-multiplexer for selecting a particular video signal from the data stream on the channel currently being received by receiver 7. Signal selector 8 further includes the necessary un-compression or expansion apparatus corresponding with the compression scheme in use by compressors 3.

15 In practice, an interactive sporting event program might be transmitted on a 6 MHZ cable television signal using a compression-multiplexing scheme which allows two sports video signals (A and B, for example) to be transmitted over a single NTSC channel (channel 34, for example). It might be desired to have four video signals (A-D, for example) for the particular interactive sporting event. A first video signal (signal A) may contain the standard broadcast signal of the game; the second video signal (signal B) may contain a close-up view of the game action; a third video signal (signal C) may contain a continuously updated replay of game highlights; the fourth video signal (signal D) may contain statistical information. These four video signals (A-D) may, for example, be multiplexed as follows: video signals A and B multiplexed onto a data stream transmitted on cable channel 34; video signals C and D multiplexed onto data stream transmitted on cable channel 35. Alternatively, all four video signals (A-D) could be multiplexed into one data stream carried on one frequency channel. These four signals may, however, be mapped by controller 9, or signal selector 8, to play as separate channel displays for the user which, when the viewer makes choices on the multiple choice controller, a seamless switch occurs therebetween. Each video signal of this interactive program may include a label

5 which reads, for example, "Full-Screen Action -- Press A: Close-up Action -- Press B: Replay -- Press C: Statistics -- Press D."

10 5 As shown, if more signals were needed for an interactive program than were mappable to a data stream on a single channel, signal selector 8 in conjunction with receiver 7 may be programmed to switch between the various video signals 1 as well as the various broadcast channels to provide the necessary level of interactivity. However, preferably all the various video signals associated with a particular interactive program are multiplexed onto a single channel.

15 10 Additionally, the signal selector 8 may store information relating to current and previous user responses. For example, the personal profile of the viewer or previous response patterns of the viewer could be stored in memory. This information may be used in conjunction with commands transmitted within the video signals, as discussed in patent No. 4,602,279, incorporated herein by reference. The stored personal profile information and received commands may be used to switch interactively between data streams and video signals without any additional response from the user.

20 20 The multiplexed interactive program may be transmitted over a single telephone line, if desired. In this embodiment, multiple choice controller 9 is programmed to switch between the various video signals on the single telephone line. If additional channels were desired, a two-way configuration is used as described below.

35 25 The system of the present invention may be utilized in an educational embodiment. In this embodiment, information is stored on each data stream in a plurality of reproducible information segments, each of which comprises a complete message reproducible by the receiver directly in response to the selection of the video signal by signal selector 8 responsive to a user selection on multiple choice controller 9. Each of the information segments in the various data streams contain interrogatory messages with associated multiple choice responses, responsive messages, informational messages, or combinations thereof.

45 30 The various information segments in the various data streams preferably relate in real-time and content so that an interactive conversation may occur as the video signals are displayed and the user responds to the various interrogatories contained in

5 the video signals. As a user answers a particular interrogatory with a multiple choice
response, the information in the video signal associated with the particular selection is
displayed by the signal selector 7. The various interrogatories, responsive messages,
10 and informational messages may generally be contained in any one, more than one or
all of the various video signals.

15 The use of a data stream containing multiple video signals per broadcast
channel may be used for many types of interactive programs, such as those disclosed
in the previously mentioned U.S. patents. Other interactive programs may be
developed which are within the scope of the present invention.

20 The present invention may also be utilized as a stand-alone system with no
transmission means necessary. In this embodiment, the digitized video signals that
make up an interactive program are stored in local storage means such as video tape,
video disk, memory (e.g., RAM, ROM, EPROM, etc.) or in a computer. Preferably,
the digital video signals are multiplexed onto a standard NTSC signal. The particular
25 storage means may be connected to any of the interactive boxes disclosed in Figures
3-5, and described below. The interactive boxes would then be connected to a
television set. Alternatively, the circuitry in Figures 3-5 below could be implemented
on a board and inserted into a standard personal computer (PC). A separate
30 microprocessor on the interactive board is not necessary for this configuration since
the standard PC processor performs the functions of the processor 108 shown in
Figures 3-5.

35 As shown in FIG. 2, the system of the present invention may be operated in a
two-way configuration. In this mode, the various video signals 1 are processed as
previously described, being digitized by A/D convertor 2 and compressed by video
25 compressors 3. The signals are then routed to a central switching station 14. In this
embodiment, the switching between the various video signals is accomplished at the
head end rather than at the receiver. Multiple choice control unit 9 relays the multiple
choice selections of the user through a relay box 17 back to the remotely located
40 switching station 14. The multiple choice selections may be relayed by relay box 17
to the switching station by any conventional means, such as two-way cable television,
45 telephone, or FM transmission. Switching station 14 receives the multiple choice
selection of the user and routes the desired signal to transmitter 5 which

5 conventionally transmits the desired video signal down the appropriate cable channel
for the particular user. If desired, transmitter 5 may also transfer conventional
programming on the cable television channels not being used for interactive
10 programming. Alternatively, switching station 4 may include multiplexing equipment
5 as previously described, and thus operate multiple interactive or noninteractive
programs over a single television channel.

For example, if it were desired to implement the interactive football game
15 program as previously described, a single NTSC cable channel may be allocated for
the program. However, in this instance, the video signals would be present at the
10 transmitting end. In response to a signal from wireless controller 9, a signal is sent by
relay box 7 to the cable TV switching station which routes the desired video signal to
20 the requesting viewer. Such a system requires very fast switching equipment, but can
be implemented using digital imagery.

Alternatively, it may be desirable to transmit the interactive sporting event
25 over a single telephone line. When the user enters a selection on controller 9, a signal
is sent via the telephone line to the central switching station which routes the desired
signal of the interactive program over the user's telephone line so that a single link
30 handles both the interactive choice being made at the receiver and the transmission of
that choice, out of a plurality of choices, from the head end where the actual switching
20 takes place in response to the interactive selection made at the receiver.

The two-way link between the user and the switching station may be used for
35 other purposes. For example, demographic data may be transferred from the user to
the broadcast network for commercial purposes, such as targeted advertising, billing,
sending a game show winner a winning number for pickup of a prize, or other
40 commercial or non-commercial purposes.

As previously described, compression systems generally perform less
efficiently when frame-to-frame content includes many changes in pixel content (e.g.,
45 during fast motion or scenery changes). The system of the present invention may be
advantageously programmed to ease the processing burden on the uncompression
30 program. When a key on the controller is depressed to select a desired signal, a slight
imperceptible delay may be effectuated if desired. This delay allows the un-
compression or expansion algorithm a short period of time to adjust to the rapid
50

5 change from one video signal to another which ordinarily causes a degradation in the efficiency of the algorithm causing video glitches to appear on the screen display.

As shown in Figure 7, a two way link (similar to Figure 2) may also be used, employing virtual channels back to the user. In this embodiment, multiple video
10 5 signals, preferably related in time and synchronous to each other, are present at a cable headend 300 on multiple channels A, B, C, . . . N of a video signal bus 250. The signals may be locally generated or received from a remote location (such as a
15 sporting arena) by receivers 200, 202, 204, and 206. Alternatively, if the remotely received signals are digitally multiplexed onto one channel, a digital demultiplexer
10 would replace receivers 200-206 and would demultiplex the signals and place each signal on a separate bus channel. The local or remote signals are synchronized by
20 sync circuit 208. A number of remote control interactive switches 210, 212, 214, 216, and 218 are connected to video signal bus 250. The multiple channels on bus 250 are provided synchronously and simultaneously to the series of remote control interactive
25 15 switches 210, 212, 214, 216, 218. These remote control interactive switches are dynamically allocated to users who request access to an interactive program. Each switch is connected to a frequency agile modulator 220, 222, 224, 226, 228 to assign
30 the switch a virtual channel in order to connect a signal from bus 250 to a specific user at a remote site. Each switch is assigned to a single user so the number of
20 switches present at the headend is the limiting factor to the number of users who can interact simultaneously. If it is assumed that only a portion of the users will interact
35 simultaneously, an algorithm is used to determine the optimum number of remote switches necessary to assure an acceptable percentage of access.

After passing through the frequency agile modulators 220, 222, 224, 226, 228,
40 25 the signals from video signal bus 250 progress through the cable (or broadcast TV) system 260. The signals may pass through RF feed 262 and amplifier 230. The user's set top box 232, 234, 236, containing a frequency agile demodulator, is tuned to the
45 frequency of the associated frequency agile modulator 220, 222, 224, 226, 228. The decoded signal from the set top box 232, 234, 236 is displayed on television monitor
30 10.

When a user desires to interact, the user issues a command on the controller 9.
50 The command is received by the set top box 232, 234, 236. A user request is sent

5 back down the cable or other transmission system 260 to one of the remote switches
210, 212, 214, 216, 218. At the appropriate time, based on the user request and the
algorithm for interactivity which accompanies the program, the remote switch makes
10 a cut during a vertical blanking interval from one signal on bus 250 to another signal
5 on bus 250. The result of this switch is modulated by one of the frequency agile
modulators 220, 222, 224, 226, 228 and sent down the virtual channel to the user, who
sees a seamless cut from one image to the other as a result of the interaction. The
15 signal delivered to the user may be full bandwidth or compressed video. Likewise the
video signal on the bus 250 delivering the simultaneous signal to the multiple remote
10 switches 210, 212, 214, 216, 218 may be compressed video. This embodiment allows
for a relatively low cost remote user box because the most costly switching equipment
20 is located at the headend and each remote switch may be allocated to any user.
Therefore, the cost is spread over the larger population of users.

As an example, it is assumed that the signal received by receiver 206 is placed
25 15 on bus line 270 of the video signal bus 250 and is forwarded to set top box 236 and
displayed on monitor 10. At some point the set top box 236 causes a user request to
be generated. The user request is based on a current or past entry on controller 9
and/or information stored in set top box 236 (e.g., information stored could be
30 previous user response information or personal profile information). The cable TV
20 system 260 may amplify the user request at amplifier 230 while carrying the user
request back to frequency agile modulator 226, which communicates the request to
remote switch 216. During the vertical blanking interval, the remote switch 216
35 disconnects from old bus line 270 and switches to the appropriate line on the video
signal bus 250, in this example line 280, based on the user request. This is shown by
25 the dotted-line connection at 290. The signal from the new connection (received by
receiver 204) is sent through the frequency agile modulator 226 on channel 47 and the
cable TV system 260 to the user's set top box 236. The new signal is seamlessly
40 displayed on television monitor 10, without any switching occurring at set top box
236.

30 As alternatives to the cable headend 300 and cable TV 260 of Figure 7, a
telephone central office and/or telephone lines may be used. This alternative would

5 allow the set tops 232, 234, 236 to receive interactive programming from a telephone company or cable headend via telephonic communication.

10 5 Figures 3, 4, 7, 16 and 17 show preferred embodiments of the receiver 7 and signal selector 8 of the present invention to enable seamless flicker-free transparent switching between the digital video signals on the same channel or different channels. These embodiments may be connected to any transmission media or simply connected to the output of any stand-alone storage means for the digitized multiplexed
15 interactive program. Preferably, the receiver 7 and signal selector 8 are both components of an interactive program box 11, which connects to a television or other display monitor. Alternatively, the required functionality of the RF receiver 7, signal selector 8 and monitor could all be combined in a standard personal computer by the
20 addition of a few components to the personal computer. To provide this capability, only an RF demodulator board, digital demultiplexer, decompressor(s), frame buffer(s), and sync components need to be added to the personal computer. These
25 15 items, and any other components, may be connected to the PC processor and storage elements as disclosed in Figures 3, 4, 7, 16 and 17. In this embodiment, the user makes selections via the computer keyboard.

30 Figure 3 shows an embodiment with a single analog frame buffer. Figure 4 includes pairs of RF demodulators, error correctors, and demultiplexers and/or a pair of digital video buffers, as described below.

35 Figure 3 shows an embodiment which allows for a seamless video switch between two or more separate digital video signals. As shown in Figure 3, a microprocessor 108 is connected to RF demodulator 102 and digital demultiplexer 106. The microprocessor 108 directs demodulation and demultiplexing of the proper
40 25 channel and data stream to obtain the correct video signal. The proper channel is determined either by examination of the user's input from user interface 130 and/or any other information or criteria (such as personal profile information) stored in RAM/ROM 120. For example, the RAM/ROM 120 could store commands provided
45 within the video signals as discussed in patent No. 4,602,279, and incorporated herein by reference. The user interface 130 may be an infrared, wireless, or wired receiver
30 that receives information from multiple choice control unit 9.

5 The RF demodulator 102 is part of the receiver 7, and demodulates data from the broadcast channel directed by the microprocessor 108. After the data stream is demodulated, it passes through a forward error correction circuit 104 into a digital demultiplexer 106. The demultiplexer 106 is controlled by microprocessor 108 to
10 provide specific video, audio and data signal out of a number of video; audio and data signals located within the data stream and steer them to the appropriate device for use within the system. In order to seamless splice from one video stream to the other it is preferred to perform the switch in the digitally compressed domain thereby
15 eliminating the need to decode two video audio and data streams at the same time.

10 When the compressed digital video is sent to the video decode function it is first stored in memory 160 until there is enough information buffered to ensure continuous playback of the video stream. Because of the compressed nature of the video information, a relatively small buffer 160 can hold a significant amount of video information (on the average of five to six frames). This means that there is a
20 significant delay from the time the compressed video is received to the time it is decompressed and played out. Therefore, the preferred method for switching in the set top would be to select the new video on the way into the video buffer 160 while continuing to play out the old video to the monitor. Because the incoming stream has been created by producing syntactically correct MPEG segments that are sliceable,
25 this can be achieved easily. By this method there is no need for additional hardware in the receiver. A video always appears to the viewer to be a single video stream with no repeated or dropped frames.

MPEG allows for the reconstruction of the video clock at the receiver 11 through use of a data field called the PCR (Program Clock Reference). This is
30 necessary to ensure that the decoder can play out the decoded video at the same rate as it was input to avoid dropping or repeating frames. Additional embedded information in the MPEG stream includes the PTS (presentation time stamp) and DTS Display Time Stamp. These signals are used to maintain lip synchronization with the audio and also to inform the receiver when to present the video and audio to the display.
45

30 Figure 4 shows an alternate, dual tuner embodiment for seamless switching between separate video signals. In this embodiment, the microprocessor 108 controls the selection of the RF channel that is demodulated by RF demodulators 102A, 102B.
50

5 The demodulated data streams enter the forward error correctors 104A, 104B. At the output of the forward error correctors, the data streams are transmitted to the input of the digital demultiplexers 106A, 106B.

10 As with the RF demodulators 102A, 102B, the digital demultiplexers 106A, 106B are controlled by the microprocessor 108. This configuration allows the microprocessor 108 to independently select two different individual time-multiplexed video signals on different channels and data streams. If all the video signals of an interactive program were contained on a single channel or data stream, it would only be necessary to have a single RF demodulator, forward error corrector, and digital demultiplexer serially connected and feeding into the two digital video buffers.

15 Two data streams are provided from the digital demultiplexers 106A and 106B. The output of the demultiplexers contain a multiplicity of video, audio and data that can now be directed to the appropriate device under microprocessor 108 control. In this way it is no longer necessary to have all of the information contained in one RF channel. Instead the information can be found at different frequencies in the RF spectrum and we will still be able to splice among the streams. By placing a simply digital switch at the output of the two demultiplexers we can avoid duplicating the entire decode chain. It should be noted that this is only a cost saving approach and duplication of the rest of the chain would work as well.

20 A standard MPEG stream contains different types of encoded frames. There are I frames (Intracoded), P frames (Predicated) and B frames (Bi-directionally predicted). A standard MPEG structure is known as a GOP (group of pictures). GOP's usually start with I frames and can end with P or B frames. There is generally only one I frame per GOP, but many P and B frames. While it is not necessary to have any I frames, they are useful for many reasons.

25 GOP's that end with B frames are considered open. GOP's that end with P frames are considered closed. For the present invention, preferable code is closed GOP's to ensure that there are no motion vectors pointing to frames that are outside of the current GOP.

30 MPEG also reorders the video frames from their original display order during the encode process in order to code the video more efficiently. This reorder must be undone in the decoder in order for the video to present properly.

Frame Order	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Frame Type	I	B	B	P	B	B	P	B	B	P	I	B	B	P	B	B	P	B	B	P
Typical Frame Reorder	1	4	2	3	7	5	6	10	8	9	11	14	12	13	17	15	16	20	18	19
Transmission Order																				
Frame Type	I	P	B	B	P	B	B	P	B	B	I	P	B	B	P	B	B	P	B	B
	GOP1										GOP2									

Splices occur at the end of the B frame at the end of GOP1 prior to the I frame of GOP2. It is important to point out that with appropriate controls the encoder can code with variable GOP length and place splice frames accurately to achieve the desired interactive effect. If the content is unrelated then the encoder can splice at the end of every GOP allowing for a multiplicity of switching opportunities. Because the GOP ends on a P frame, a closed GOP is yielded.

Improved Seamless Switching in a Digital System

Any of the above-described reception unit embodiments can be used to handle the seamless switching of the present invention. In the preferred embodiment, however, seamless video switching at the reception units is enhanced through certain novel modifications to the encoding process.

As set forth above, seamless switching between digital video signals, whether representing independent television programs or different related signals within one interactive program, is critical to the viewing experience. Seamless switching is defined as video stream switching that does not produce visible artifacts. The effect of the encoding process is to simplify and enhance the seamless switching process.

The encoding process is performed at a central location, the elements of which are shown in Figure 5. As seen in Figure 5, a plurality of video signals 300 are shown which could comprise live or prerecorded video streams. The origin of the video signals could be from cameras for live video, video servers, video tape decks, DVD, satellite feed, etc. The video signals can be in MPEG format, HDTV, PAL, etc.. A plurality of audio signals 308 may originate from CD, tape, microphones, etc..

5 The data codes, shown emanating from the data code computer 316 in Figure 5, are the interactive commands for interactive processing used by the set top converter, as discussed above. Preferably, the data codes are part of an interactive scripting language, such as the ACTV scripting language, originating in a coding
10 5 computer 316. The data codes are also forwarded to the encoder 312. These data codes facilitate the multiple interactive programming options at the reception units. This embodiment requires a data channel for enabling a synchronous switch between
15 a first video stream and a second video stream. This data channel comprises the codes which link together the different program elements and information segments on the
10 different video signals.

20 Referring again to the video signals 300, the plurality of video signals 300 are genlocked in the video genlock device 304 and thus, time synchronized. The time synchronized video signals are directed into the video and audio encoder 312. In the preferred embodiment, compatible encoders 312 are required at the cable headend to
25 15 work with the digital reception units at the remote sites. The interactive applications of the current invention are preferably facilitated by synchronizing the commands at the headend to a specific video frame and a specific audio frame. This level of
30 synchronization is achievable within the syntax of the MPEG-2, 4 or 7 specifications.

30 In order to facilitate the seamless switch at the reception sites, the video
20 encoders 312 are preferably time synchronized. This synchronized start is necessary to ensure that the splice points that have been placed in the video content occur at the
35 correct frame number. While it is not necessary to obtain this level of accuracy for all program types, it is achievable in this manner. This provides content producers with the ability to plan video switch occurrences on a frame boundary within the resolution
40 25 of the Group of Pictures (GOP). SMPTE time code or Vertical Time Code (VTC) information can be used to synchronize the encoders 312. Additionally, a splice can be placed accurately at any frame by utilizing the variable length GOP. Upon
45 command from an external controlling device such as the ACTV command code computer 316, the encoder 312 can be directed to insert a splice at an frame number.
30 Making encoder modifications at the headend ensures more effective seamless switching at the set top converters.

5 As shown in Figure 5, multiple video signals 300, data codes 316 and audio
signals 308 are input into the encoder 312. In the preferred embodiment, four video
channels are input into the encoder 312. However, more or less video streams may be
input based on the content that is to be delivered. In the current environment,
10 5 practical limitations for the number of videos are based on picture quality.
Ultimately, however, there will be no limit to the number of videos and audios that
can be contained within a single channel. Further, all current limitations can be
removed through the use of the alternate embodiment that describes a two tuner
15 implementation.

10 Preferably, the encoder 312 uses a standard MPEG-2 compression format.
However, MPEG-4 and MPEG-7 as well as other compression formats, such as
20 wavetlets and fractles could be utilized for compression. These techniques are
compatible with the existing ATSC and DVB standards for digital video systems.
Certain modifications, however, are made to the MPEG stream in order to facilitate
25 15 the preferred seamless switching at the set top box. These modifications to the
encoding scheme are described below with reference to the video frame structure 332
shown in Figure 6.

30 Switches at the remote reception sites will occur at the video splice point 336.
Program switching is facilitated through the provision of splice points. The splice
20 points are identified within the program stream via the adaptation field data. Program
switching occurs at these points based on user inputs, personal profile information
35 stored in memory at either the set top converter or the headend, and commands from
the program source.

25 With respect to creation of the video splice point 336, the video encoder
inserts splice points at every Group of Pictures (GOP), as shown in Figure 6. A GOP
40 consists of generally one I frame and a series of P and B frames, based on parameters
set within the MPEG scheme. Preferably, the GOP is encoded as a "closed" GOP
structure, which means that the GOP concludes on a P frame. Therefore, no motion
45 vectors to the next GOP are present. If motion vectors cross from one GOP to the
30 next GOP, artifacts are created and visible when the screen is switched. Thus, a
closed GOP structure is necessary for compliance with MPEG syntax and to ensure
50 the absence of visible artifacts after execution of the splice.

5 The GOP length is programmable and can be within 1 to infinite frames of video. It is preferred, however, that the GOP comprise 10-15 video frames. Referring to Figure 6, four video signals are shown. It is desired that a seamless switch be made from any video signal to any other video signal.

10 5 As shown in Figure 6, seamless video switching occurs on a GOP video-frame boundary. For pre-recorded material, splice points need to be identified for switch points. For programming where "free" channel selection is required (e.g., sports), all GOP boundaries are encoded as splice points. While the switch must appear
15 seamless, it need not occur immediately. For example, a command or key input requires a finite time for processing. Therefore, a video switch may be delayed by up to 1.5 GOP's.

20 As shown in Figure 6, splices take advantage of the non real time nature of MPEG data during transmission through the digital channel to create a time gap 340 in which the decoder can be switched from decoding one stream to decoding the other during the gap 340. Thus, the gaps 340 shown in Figure 6 represent the switch times.
25 15 The key is that the most complex video is completed and through the channel before the first packet of the next GOP is through the channel. By encoding at a lower bit rate than the channel capacity, some extra time is created at the end of the GOP in order to switch. In this way, two MPEG streams are merged to create a single
30 syntactical correct MPEG data stream. These gaps can be created at the encoder 312, shown in Figure 5, using any compression scheme.

35 The audio signals, preferably, are encoded using the AC3 format. The present invention, however, covers any conventional audio encoding scheme.

40 25 All of the various video, audio and data signals are digitized and combined in the encoder 312, in Figure 5. Preferably, the compressed and encoded signal is output in DS3, Digital High Speed Expansion Interface (DHEI) or any other conventional format. The data type is not important, it is just data. The encode process then
45 outputs a digital data stream at the appropriate bit rate for the target channel.

50 30 The modulator 320 may utilize one of several different possible modulation schemes. Preferably, 64-QAM is chosen as the modulation scheme. If so, the data rate at the output of the modulator 320 is around 29.26 Mbps. However, any of the following modulation schemes, with respective approximate data rates, or any other

conventional modulation scheme (such as FSK, n-PSK, etc.) can be used with the present invention.

<u>Modulation Scheme</u>	<u>Rate</u>
64-QAM	29.96 Mbps
256-QAM	40 Mbps
8 VSB	19.3 Mbps
64 QAM PAL	42 Mbps
256 QAM PAL	56 Mbps

Separate NTSC channels are then combined in a conventional combiner, preferably using frequency modulation. Thus, seamless switching at the set top converters can occur from one signal to another within one NTSC channel or from one NTSC channel to another NTSC channel, as discussed below.

In summary, seamless switching at the decoder is facilitated at the encoder 312 by time synchronizing the signals, time locking the encoders and creating a time gap 340 to each of the digital video streams (which represents the difference between the encode rate and the channel capacity) to GOPs, defined below.

After encoding, modulation and multiplexing, the signals can be transmitted to reception sites via satellite, wireless, land line, broadcast, or any other conventional transmission system. In the preferred embodiment, the signals are distributed to remote sites via cable or other transmission media.

Reception Sites

At the reception sites, preferably consisting of the elements shown in Figure 7, the signal is received via a tuner mechanism 344. The tuner 344 may be a wide band tuner, in the case of satellite distribution, a narrow band tuner for standard MPEG signals, or two or more tuners for seamlessly switching between different signals located in different frequency channels, as explained below. In the case of MPEG signals, the tuner 344 tunes to the particular NTSC channel indicated from command by the host processor 360. The host processor 360 is preferably a Motorola 68331 processor, but may be any conventional processor including PowerPC, Intel Pentium, etc.

The signal is then forwarded to the demodulator 364. The demodulator 364 demodulates the combined signal, strips off the FEC and forwards the digital signals

5 to the video and audio decoder 372. At the digital decoder 372, the signals are separated and decompressed. The decoder 372 strips off the program identification number (PID), and routes these PIDs to the appropriate decoder, whether video, data, audio or graphics. The audio is preferably forwarded to the Dolby digital processing
10 5 IC 380. The selected video and audio is then decoded, as explained below, and the video is sent to the video digital-to-analog (D/A) converter 388 which prepares the selected video for display.

15 A phase lock loop (PLL) recovers the encode clock, which was encoded in the PCR portion of the MPEG adaptation field. Preferably, a ROM holds the operating system for the reception unit 342 and is backed up with Flash-ROM to allow for
20 10 downloadable code. Further, there are memory devices connected to the decoders 372, 380 and graphic chip 376, which are used to store graphics overlays, for example. Furthermore, profile data for various users in the home can be stored in nonvolatile RAM or ROM 352.

25 15 A backchannel encoder and modulator 368 are present for sending data back to the headend. Such data may comprise personal profile information, interactive selections, demographic data for targeted advertising purposes, game show scores, etc.

30 Further, the reception unit 342 permits new software applications to be downloaded to the unit. These applications can control the unit and redefine the
20 20 functionality of the units within the constraints of the hardware. Such control can be quite extensive, including control of the front-panel display, the on-screen display, all input and output ports, the MPEG Decoder, the RF tuner, graphics chip and the mapping of the IR remote functions.

35 Preferably, the interactive programming technology, including providing for
40 25 multiple camera angles; individualized advertising, etc., of the present invention is implemented as a software application within the reception unit 342. Such technology is preferably located within ROM or Flash-ROM 352 of the reception unit, shown in Figure 7. The interactive technology, however, could alternatively be located in any
45 30 type of memory device including RAM, EPROM, EEPROM, PROM, etc.. As such, the software shall have access and control over the hardware elements of the device. In the preferred embodiment, no additional hardware is required for full use of the

5 interactive programming technology within the reception unit 342 to achieve the performance described above.

10 Any type of conventional remote control device 348 can be used with the present invention. It is preferred, however, that the remote control device 348 be an infrared (IR) device and include four or more option buttons and their associated IR codes.

15 Seamless video switching at the reception unit 342 is explained in the paragraphs below. The reception unit 342 shown in Figure 7 preferably is capable of real-time MPEG-2, MPEG-4 or MPEG-7 decoding. The reception unit 342 monitors user interactions and information transmitted from the program source and seamlessly switches video and audio streams as appropriate.

20 Based upon the viewer's responses and requests, the unit automatically and seamlessly switches between video, graphics and audio programming sequences reflecting the viewer's earlier responses. The interactive technology of the present invention permits a high level of interactivity while not requiring the set top unit 342 to transmit any information back to the programming source.

25 In the video decoder 372, shown in Figure 7, the header data is stripped off the MPEG stream. The particular video is then selected based on a command from the host processor 360. The associated audio is sent to the audio decoder portion 380. The selected video is buffered in a standard video buffer and then output for decoding. The physical buffer size is defined by the MPEG standard, herein incorporated by reference. Enough time must be allowed at the initial onset of decoding to fill up the buffer with I-frame and other data.

30 After buffering, the selected video goes through various steps of an MPEG decode process, which utilizes a variable length decode (VLD) preferably. Generally, the variable length decode converts the run-length encoded datastream and converts it into its longer bitstream format. The bitstream is decoded into its constituent parts i.e. motion vectors, dct coefficients and the like so that the video can be reconstructed. Subsequently, the datastream is converted into frequency domain information using an inverse Discrete Code Transform DCT filter. If the frames are intercoded, the pixel data is generated and stored in a buffer.

Referring to Figure 7, the seamless switch from one to another MPEG video stream is explained. Switches will occur on video splice points, as shown in Figure 6. When the demux/decoder 372 in Figure 7 sees the splice point, it switches to the selected video signal which is sent to the buffer. Thus, prior to the switch, the first video signal frames are still being buffered. The next signal PID is loaded into the decoder 372 from the host processor 360. In order to accomplish a switch to one of the four video streams, the video decoder 372, shown in Figure 7, must identify the PID number of the new video stream. Further, it is preferred that each incoming video and audio stream shall have its own PID, known to the interactive application stored in memory at the set top converter 342, in order to facilitate seamless switching among the independent video and audio streams. It must then call the routine that performs the switch. This next PID, identifying the next selected video signal, can be based on either user selection or by way of the interactive control codes or both. Once the next PID is loaded, the decoder 372 begins to look for the selected video stream and, because of the gap 340 created in the video datastream, the decoder 372 will always find the header information of the next video. Once the splice point indicator of the first video is seen by the decoder 372 and the second video signal is identified by the decoder 372, the second compressed video signal begins to load into the buffer as the first video signal continues to play out. The new video signal is selected based on either user selection or based on an interactive control code.

One of the items necessary for a seamless switch is the splice point counter and a splice point flag. Both of these indicators are placed in the adaptation field of the MPEG video streams. The splice point counter indicates the number of video packets prior to the splice point. The splice point flag indicates that the splice count is present in the stream. Once the decoder 372 determines the splice point, it can begin buffering the next video stream and continue decompressing the signal as if it were one MPEG stream.

Audio Switching

As with the video streams, preferably four AC-3 audio streams, each of which is identified by a unique PID, exist per service. PID numbers are obtained from the MPEG-2 transport table such as SI, PG, and PM at the invocation of the interactive service. One of these PIDs is selected as the default audio channel and is selected

5 upon acquisition of a service. The remaining three channels are optional and shall be
selected by the Control Program based on Control Messages and/or User Input. While
audio channels normally switch with the associated video channel, they may also be
switched independently.

10 5 In the preferred embodiment, switching occurs on frame boundaries, as shown
in the digital frame representation 392 of four audio streams of Figure 8. When
switching from one channel to another, one frame may be dropped (in this case, frame
15 5), and the audio resumes with frame 6 of the new channel. The audio decoder 380 is
capable of audio switching by provision of the insert of audio splice points at the
encoder 312, shown in Figure 5. Preferably, the encoder 312 inserts an appropriate
value in the splice countdown slot of the adaptation field of the current audio frame.

20 When the audio decoder 380 detects this splice point the decoder 380 may
switch audio channels. Although the audio splice is not seamless, the switch will be
nearly imperceptible to the user.

25 15 Data Commands

Because the data commands are time sensitive in the digital embodiments,
they are sent from the headend via a command data PID (Packet Identification). The
commands must be synchronized with video GOP's at the encoder end. In order to
30 accomplish this, the data codes computer 316, shown in Figure 5, must send
individual commands as a whole packet. Each command can consist of as few as two
20 bytes. Therefore, the generator must pad the rest of the packet with code FF (hex)
bytes. When this whole packet is sent to the encoder 312, the encoder 312 will
transmit it at its earliest convenience. If a partial packet is sent to the encoder 312, the
encoder 312 does not send the command until subsequent commands filled the
remainder of the packet.

40 25 The commands, as identified in (1) ACTV Coding Language, Educational
Command Set, Version 1.1, and (2) ACTV Coding Language, Entertainment
Command Extensions, Version 2.0, both of which are herein incorporated by
reference, are formed by stringing together two to six byte long commands. The
45 30 command data is presented to the encoder's ISO interface and packet stuffed to ensure
timely transmittal of the command data.

5 The Control Program is preferably stored in RAM 352. The processor 360 receives instructions from the Control Program. Further, key inputs such as user responses, personal profile information as well as control messages are used by the processor 360 in making switching decisions.

10 5 Preferably, the Control Program operates in five modes as determined by the received interactive command messages. The five modes are as follows:

- 15 • Switch Audio and/or Video Based on User Input
- Switch Audio based on User Input and stored data
- Switch Audio and/or Video based on User Input and stored data
- 10 • Switch Audio and/or Video based on Control Messages
- 20 • Switch Audio and/or Video based on Control Messages and stored previous input.

Multiple modes may be used by the Program simultaneously.

25 15 The first mode above, switch audio and video channels, is the simplest mode of operation. The Control Program is commanded by the microprocessor 360 to accept one of the four Remote input key codes and to switch to the corresponding audio/video channel. The Program performs this switch on the video frame boundary at the end of the current GOP. Once the new channel is displayed, the Program has the capability to update the On-screen display with new text and/or graphics messages either received in the datastream from the headend or stored locally.

35 The second mode above, Display One Video Channel and Switch Audio Channels, continuously displays a single video channel. When a remote input key code is received, the video continues but the audio channel is switched on the appropriate audio frame boundary. As mentioned above, the appropriate audio frame boundary is determined by examining the splice point counter value in the adaptation field. The choice made by the user is stored in a RAM register. Any time a choice is made by the user, the key code and the previously stored choices are reviewed by the Program to determine the next audio channel.

45 30 The third mode identified above, Switch Audio/Video Channels Based on User and Previous Choices, displays an initial audio/video channel. When commanded by the Command Message stream, text is displayed on the On-Screen display. The Program then waits for a user input. When the user input is received, it

5 is stored in a RAM register along with previous user choices. The register is
examined by the Program and then, based on stored logic, determines the next
audio/video channel to be displayed.

10 The fourth mode identified above, Switch Audio/Video Channels Based on
5 Control Messages, also displays an initial audio/video channel. The Program then
waits for a control input from the Control Message stream. Based on this input, the
Program switches channels on the video frame boundary at the end of the current
15 GOP.

The fifth mode above, Switch Based on Control Messages and Previous
10 Choices, displays an initial audio/video channel. The Program then waits for a control
input from the Control Message stream. When the Control Message input is received,
20 it is stored in a RAM register along with the previous user and control message
choices. This register is then examined by the Program to determine the next
audio/video channel to be displayed.

25 15 Digital Video Systems and Applications

The following paragraphs disclose several applications using the digital
embodiments disclosed above in Figures 1-8 and the two tuner embodiments,
30 described below, of Figures 16 and 17.

TV Broadcast Station Switching

20 In this embodiment 412, the seamless switch from one signal to another signal
is done at a TV broadcast control center and forwarded to the users' digital reception
35 sets 408, as shown in Figure 9. At the headend 396, several digital programs are
combined according to any of the methods explained above.

Upon receipt of the programs by the broadcast station, the signals are fed into
40 25 a digital stream selector 400. This selector comprises the elements discussed above in
any of the alternative embodiments for performing a seamless switch (Figure 1-4, 7,
15-17), except for the fact that this unit is not located at the remote sites. The unit
works in the same manner as discussed above. Regardless of whether the digital
45 stream selector 400 selects amongst multiplexed signals in one datastream on one
30 channel, centered on a certain frequency, or between signals in different datastreams,
or from a received signal to a locally inserted ad, all such switches are seamless in the
embodiment shown in Figure 9. As discussed above, selections can be made as a
50

5 function of station prerogative, remote user selections and/or personal profile
information (transmitted to the TV station via a backchannel), or targeted advertising.

Once a selection is made the program signal is transmitted by any
conventional means 404 to the remote sites 408 for presentation.

10 Non-related Program Switching

Figure 10 discloses an embodiment 430 for switching between non-related
programs. In other words, this is simply switching from one TV channel to the next
TV channel. Presently, switching from one signal to another cannot be accomplished
without flicker in the digital environment.

10 In the present invention, a viewer may switch from one program to another
program, whether related or unrelated, and the transition will be seamless. In other
words, there will be no visible artifacts present in switching from one program to
another program.

20 If the programs are compressed and multiplexed within one MPEG stream,
any of the embodiments disclosed herein are capable of performing the seamless
switch. If the programs are in separate NTSC channels, one of the digital "two tuner"
embodiments (Figures 4, 16 and 17) must be used to allow for the frequency shift.

30 The high level elements of the system 430 for non-related program switching
are shown in Figure 10. Preferably, the non-related programming is compressed and
multiplexed using an MPEG stream into one datastream using one NTSC channel at a
video encoder chassis 416. Non-related programming can be combined into one
MPEG stream or can be directed into different NTSC channels. For example,
programming may consist of sports, news, sitcom or children's programming. These
programs are modulated at a modulator/upconverter 420 and transmitted across any
suitable transmission means 429 as discussed above.

40 End users are capable of viewing digital programming on either a digital
monitor/tuner, a personal computer or through an external converter 428, connected to
an analog television set, in which case the seamless switch is performed in the
converter. Either of these various components allows a user to "surf" channels based
on a viewer's preferences. Again, the reception unit can be selected from any of the
alternatives explained in Figures 1-4, 7, 15-17.

Seamless Switching within Multiple Event Programming

In this application, shown in Figure 11, a system 450 is provided for allowing a user to switch between separate events within a single program. For example, an Olympics broadcast may simultaneously comprise several programs corresponding to different events, e.g. skiing, speed skating, figure skating, ski jumping etc. Preferably, these separate event programs are compressed and multiplexed into one MPEG digital stream at the video encoder chassis 434, passes through the modulator/upconverter 438 and transmitted as a single NTSC signal via the transmission means 442. These event programs, however, may also be encoded at the broadcast center onto separate NTSC channels.

After modulation and subsequent transmission, these programs are received at the remote sites 446. The remote sites 446 include a reception unit, which contains either a digital monitor/tuner, a personal computer, or a external digital converter connected to a monitor. The user may select between the different programming events via his or her remote control device. When the user desires to switch to another event program, the switch will be performed seamlessly according to any of the methods and systems discussed above (Figures 1-4, 7, 15-17).

Seamless Picture-in-Picture Program Switching

Figure 12 discloses an embodiment 470 for switching between preferably non-related programs using "picture-in-picture". Regardless of whether the user is switching between programs in the small framed display or the large framed display, all such switches are seamless with the present invention.

In the present invention, a viewer may switch from one program to another program in either of the two displayed windows. In other words, there will be no visible artifacts present in switching from one program to another program.

The high level elements of the system for picture-in-picture program switching 470 are shown in Figure 12. Preferably, four to seven programs are compressed and multiplexed into an MPEG stream into one datastream on one NTSC channel at the video encoder chassis 454. Other programs are combined into other MPEG datastreams at the video encoder chassis 454. For example, programming may consist of sports, news, sitcom or children's programming. These programs are

5 modulated and transmitted across any suitable transmission means 462, as discussed above.

10 End users are capable of viewing digital programming on either a digital monitor/tuner, a personal computer or through an external converter 466, connected to an analog television set, in which case the seamless switch is performed in the converter. The embodiment and flow disclosed in Figure 12 allows a user to invoke the picture-in-picture feature and seamlessly switch between different programs within a single MPEG stream. If switching from one MPEG multiplexed stream to another is desired, the converter, PC or digital monitor/tuner 466 will require the employment of a multiple tuner/decoder, examples of which is shown in Figures 4, 16 and 17.

20 Switching within Multiple Commerce/Shopping Programming

One application of the current invention involves a transaction based system with return paths, as shown in Figure 13. As with the other embodiments discussed above, the video encoder 474 compresses and multiplexes several different programs onto one or more NTSC channels for transmission to the remote sites.

25 Preferably, several different types of shopping programs are compressed and multiplexed onto a single NTSC channel. For example, separate programs may be directed at clothes, jewelry, housewares, etc. If more programs are necessary than allowable on a single NTSC channel, more than one NTSC channel may be utilized by the present invention.

30 The programs are transmitted to the end user reception units 486, as shown in Figure 13, over any suitable transmission means 482. At the reception units 486, the user can seamlessly switch between different product genres. Alternatively, the reception unit 486 can switch to certain product programming based on personal profile or demographic information. In this manner, only those products which most closely match or suit a particular individual's interests and desires will be presented to the user. Such data can be stored in either storage in the reception unit 486 or at the headend.

35 If the user determines that he or she would like to purchase or receive additional information regarding a product, the backchannel 490, such as that shown in Figure 10, can be used to transmit such requests back to the central location.

Digital Program Insertion — Addressable Advertising

Figure 14 discloses an embodiment 526 for providing digital program insertion. At certain predetermined times during the programming, certain advertisements are displayed to the viewer. In the preferred embodiment, advertisements are individualized to the particular viewer based on personal profile information or demographic information. Such targeted advertising is described in the following paragraphs.

At the central location, a plurality of advertisements is inserted into the programming stream. Preferably, the central location uses a hybrid digital insertion system for insertion of the advertisements into the programming. Hybrid digital equipment replaces the tape decks of the analog system with computers, disk drives and decoder cards, as set forth in the CableLabs Cable Advertising White Paper, herein incorporated by reference. The advertising content 506 may originate from any one of a number of possible sources, including, but not limited to, server, tape decks, satellite feed. For storage, preferably the spots are digitally encoded and compressed in an off-line process, using MPEG1, MPEG1.5, MPEG2, or a proprietary method. Distribution from the encoder to the server and to the playback systems can be done through a network or by disk or tape.

After encoding, the spots are distributed to a server for storage until required for playback. Preferably, a spot can be played directly from the server to a decoder card, for conversion back to analog. The spot is converted to analog, then sent through the insertion switcher in the conventional manner. The output video and audio would then be forwarded to the audio and video encoder shown in the central site configuration in Figure 5, after which the spots are digitally encoded and compressed as described in the paragraphs above, with reference to Figure 5.

Although not as efficient as digital advertising insertion, the actual switching of the advertising into the programming can also be accomplished with conventional advertising insertion systems, using analog or tape based systems.

The placement and display of advertisements into the programming stream are controlled through the use of signaling and addressability command insertion 498. Personalized advertising can be effectuated by addressing certain advertisements for certain viewers. For example, a certain car company wants to individualize its

5 commercial to best meet the needs and desires of the viewer. If it is known that a particular user is male and enjoys outdoor activities, the programmer may want to show the advertisement corresponding to the Car Company's Sports Utility Vehicle as opposed to a small economy car. The advertisements can be pushed to the end user based on data stored at the remote end user unit or in the stream addressed to the end users device via the set-top controller in the provider's headend.

10 5 Preferably, several advertising options are encoded according to the manner described above with reference to Figure 5. Because the advertising spot videos are genlocked and time synched at the encoder 510, switching from the main programming to one of the advertisements will appear seamless to the viewer.

15 10 Seamless Switching from a Group of Signals to another Group of Signals at a Server

20 In another embodiment of the present invention, the process of switching among live and served video content is described. As opposed to switching from a single digital signal to another single digital signal at the remote reception units, this embodiment allows for a seamless transition from one group of signals to another group of signals. It is necessary that the transition take place in a manner such that the output bitstream is continuous and correct to the MPEG syntax. Proper switching ensures that any standard MPEG decoder plays the resulting bitstream as if it were a stream with no errors.

25 15 The preferred embodiment 530 for performing this switch is shown in Figure 15. The elements of Figure 15 are located at a cable headend or alternatively, at a centralized op center for a satellite distribution network. For purposes of explanation, a group of live signals are denoted as the Group A signals and the Group B signals are presumed to be stored prerecorded signals, preferably stored at the server 550. For example, the Group A signals may comprise several videos representing different camera angles at a sporting event. The Group B signals may represent a series of commercials. It is understood, however, that both the Group A and/or Group B signals could represent either prerecorded or live signals.

30 20 In this embodiment, it is desired to switch from the Group A signals to the Group B signals. The Group A signals are received at the server 550 from a real time encoder 546, located either locally or at a remote site. A specialized MPEG digital packet is inserted into the Group A content stream on a specific channel. The

5 Command and Control terminal 534 provides an analog tone in the video signals prior to analog-to-digital conversion. Once the signals reach the Real Time Encoder 546 from the Command and Control terminal 534, the Real Time Encoder 546 inserts a
10 5 digital tone at the appropriate point in the Group A digital stream upon detection of the analog tone. Once the tone is inserted, the Group A digital stream is output from the Real Time Encoder 546 and forwarded to the Server 550 at the headend. Once
15 received at the server, the Group A stream is forwarded to an MPEG transport switch device in the server 550. The Control Terminal 538 sends a command to the MPEG transport server switch device to cause the switch to begin looking for the inserted
20 10 digital tone.

20 In order to play back the Group B content, the server switch device must decode timing information from the Group A digital stream and subsequently, restamp the Group B content with the appropriate timing signals from Group A. Preferably, this is accomplished by genlocking to the PCR's videostream, preferably the same
25 15 stream with the digital tone embedded therein, and stripping out the program clock reference (PCR) out of the videostream to recreate the encode clock of the original Group A content. At this point, the switch device has the ability to re-insert the timing information into the Group B content to prepare it for playout.

30 Upon detection of the digital tone, the server switch device initiates a transition to the Group B digital stream, comprised of the Group B prerecorded signals. Preferably, the server switch device has prior knowledge of the length of the
35 20 Group B content and, therefore, when the server switch device senses the end of the Group B content, it switches back to the Group A content. The resulting digital stream output from the server to the transmitter comprises both Group A and Group B
40 25 content. The transmitter 554 forwards the digital data stream to the remote reception sites, as previously described.

45 In this manner, at certain times during the presentation of a sporting event, represented via the plurality of live digital video signals (i.e., the Group A content), for example, the received videostream at the receive converter units will automatically
50 30 transition to the Group B prerecorded content based on the action by the server switch device, for example. The decoder at the reception sites then selects one of the advertisements in the Group B content, as previously described. At the end of the

5 advertisements, the decoder automatically begins receiving the Group A content again and selects one of the live signals, as previously described. In this manner, a seamless switch from live encoded video content to prerecorded content is effectuated at the server.

10 5 Two Tuner Embodiments for Seamless Switching

Digital Stream to Digital Stream Switch

15 A two tuner embodiment 558 for providing seamless switching from a digital signal located in one frequency channel (hereinafter, "Channel A") to another digital signal located in another frequency channel (hereinafter, "Channel B") is shown in Figures 16A and 16B.

20 As shown in Figures 16A and 16B, this embodiment comprises two tuners 560A, 560B (for tuning to separate frequency channels), a microprocessor 564 (for selecting the frequency channels and digital signals embedded therein), digital demodulators 568A, 568B (for demodulating the signals from the carrier), a digital demux/decoder 572 (for stripping out the selected audio, video and data of the selected content from the composite digital stream) and a display processor 576 (for formatting the video signal for display).

30 This embodiment operates to switch from one digital data stream in Channel A to another digital data stream in channel B as follows. A first tuner 560A is tuned to Channel A and is receiving a composite digital stream, preferably comprising a plurality of digital video, audio and/or data signals, in the associated frequency channel. The composite digital stream is passed from the first tuner 560A to a digital demodulator 568A. The type of demodulation can be any of those conventionally known in the art, such as those described above.

40 25 The composite digital stream is then directed to the input of the digital demux/decoder 572, wherein the selected audio and video signals are stripped from the composite digital stream in a demux 573 and forwarded to the audio and video decoders 575, 574, respectively. Those signals are then decompressed and decoded based on the signal encoding scheme, preferably one of the MPEG schemes. Once decoded, the audio and video (and/or data, if appropriate) are forwarded to the display processor 576 and subsequently to the monitor.

5 Once a decision is made to switch to another digital signal in frequency
Channel B, the microprocessor 564 sends a command to the second tuner 560B to
pretune to the Channel B frequency. The composite digital stream in Channel B is
10 passed through the digital demodulator 568B and forwarded to the digital
5 demux/decoder 572. At this time, the digital demultiplexer 572 receives both the
digital streams located on Channel A and Channel B. Thus, if both Channel A and
Channel B carried four digital signals, the demultiplexer 572 receives eight digital
15 signals. The digital demultiplexer 572 receives a command from the
microprocessor 564 indicating which of the digital signals to strip out from the
10 composite digital stream from Channel B. Separately, the digital demultiplexer 572
strips out the selected video and audio (and/or data) signals from the composite digital
20 streams from Channel's A and B. The selected signals are forwarded to the video and
audio decoders 574, 575. The video decoder 574 switches from the currently
displayed video signal to the newly selected video signal as described above with
25 reference to Figures 6 and 7. Therefore, the decoder 574 identifies the splice point in
the present stream. Once the decoder 574 detects the splice point, it determines that it
is the appropriate time to switch to the second stream. The decoder 574 begins
loading the second stream into the buffer and a seamless switch is effectuated because
30 of the time gap in the first stream. Once the second stream is output from the decoder,
20 it is forwarded to the display processor 576, where the video signal is formatted for
display.

35 The audio decoder 575 performs the switch from the present audio stream to
the second audio stream, in the same manner as described above with reference to
Figure 11. Once the switch is completed, the second audio stream is forwarded to the
25 display processor 576.

40 Switch from Analog Signals to Digital Signals or Digital Signals to Analog Signals

 A two tuner embodiment 590 for switching from an analog signal located in a
first RF channel to a digitally compressed signal in a second RF channel or vis versa
45 is shown in Figure 17. In this embodiment, a viewer is watching a particular channel,
30 whether it be an analog or digital signal, in one specific RF frequency and there is a
decision made to switch to another channel, whether it be analog or digital, in a

5 different RF frequency. Two tuners 560A, 560B are used to transition from one RF frequency to a different RF frequency.

10 Assuming by way of example that the viewer is currently watching a channel (Channel A) with an analog signal and the decision is made to switch to a digitally
5 compressed signal in a different channel (Channel B), the embodiment of Figure 17 operates as follows. With respect to the analog signal, one of the tuners 560A tunes to the RF frequency associated with Channel A. Because the channel carries an analog
15 signal, the tuner 560A directs the signal to the analog demodulator 569A and VBI decoder 570A. The analog demodulator 569A demodulates the analog signal using
10 any conventional analog demodulation scheme known in the art. The VBI decoder 570A strips out any information (e.g., interactive commands, close captioning) embedded in the vertical blanking interval (VBI). The demodulated
20 analog signal is then forwarded to the analog display processor 580, which formats the analog signal, and then outputs it to the VBI switch 588 and then display device.

25 15 If a decision is made to switch to a channel containing muxed and compressed digital signals, the microprocessor 564 determines the RF frequency location of this channel and forwards the information in a command to the second tuner 560B. Upon receipt of the command, the second tuner 560B pre-tunes to the indicated second RF
30 frequency (Channel B). The output of the Channel B is forwarded to the input of the digital demodulator 568B, which demodulates the signal using any of the digital demodulation schemes known in the art. The digital data stream is output from the
35 demodulator 568B and received at the digital demux/decoder 572. The microprocessor 564 sends a command to the digital demux/decoder 572 indicating the selected digital signal. The digital demux/decoder 572 demultiplexes the plurality of
40 25 digital signals and decompresses such signals. The resulting selected constituent parts (audio, video and data) are then forwarded to the appropriate decoders 574, 575 (see Fig. 16B), as described above with reference to Figure 16, whereby the video
45 decoder 574 begins to decode the video information and sends a signal to the microprocessor 564 signaling that the stream was properly decoded and that the audio
30 was in lip synchronization.

The video and audio signals are then forwarded to the digital display processor 584, wherein the signals are converted from digital to analog. The resultant

5 analog signals corresponding to Channel B are then input into the VBI switch 588.

Upon command from the microprocessor 564 to switch the two videos, the VBI switch 588 switches during the appropriate time during the vertical blanking interval, resulting in a switch from the analog to the digital channel.

10 5 If it is desired to switch from a digital channel to an analog channel, the process identified above is simply reversed and the second tuner 560B pre-tunes to the analog channel. Further, the embodiment shown in Figure 17 can switch from analog to analog channels.

15 10 Although the present invention has been described in detail with respect to certain embodiments and examples, variations and modifications exist which are within the scope of the present invention as defined in the following claims.

Claims

5

10

15

20

25

30

35

40

45

50

55

5

CLAIMS

10

1. A seamless switching unit for receiving programming and performing a seamless switch from a first digital video signal to a second digital video signal, comprising:

15

5 a microprocessor, the microprocessor selecting the signals for display;

a digital demodulator, connected to the microprocessor, for receiving and demodulating a program signal, the program signal containing the first and second digital video signals;

20

10 a digital demultiplexer/decoder, connected to the first digital demodulator and microprocessor, for demultiplexing the program signal to obtain the first and second digital video signals, and directing the first digital video signal into a buffer, and for decompressing the first digital video signal;

25

15 wherein, upon command from the microprocessor to switch to the second digital program signal, the digital demultiplexer/decoder searches for the splice point of the first digital video signal and upon recognition of the splice point, loads the second digital video signal into the buffer as the first video signal continues to play out of the buffer, and wherein the switch from the first video signal to the second video stream is seamless.

30

35

20 2. The seamless switching unit of claim 1 wherein the first and second digital video signals comprise one or more regular television program signals.

40

3. The seamless switching unit of claim 1 wherein the first and second digital video signals comprise one or more interactive program signals of an interactive program.

45

25 4. The seamless switching unit of claim 1 wherein the first and second digital video signals comprise one or more advertisements.

50

55

5 5. The seamless switching unit of claim 1 wherein the seamless switching unit is
implemented in a subscriber reception unit, the subscriber reception unit receiving
programming from a subscriber distribution network selected from the group
10 consisting of cable television, broadcast television, and direct broadcast satellite.

15 6. The seamless switching unit of claim 1 wherein the first and second digital
video signals comprise different camera angles of the same event.

20 7. The seamless switching unit of claim 1 wherein the seamless switching unit is
implemented in a subscriber reception unit, the subscriber reception unit comprising a
television monitor for displaying the first and second digital video signals.

25 8. The seamless switching unit of claim 1 one of the digital video signals
contains a close-up view of an event.

30 9. The seamless switching unit of claim 1 wherein the digital video signals are
transmitted over a single cable channel.

35 10. The seamless switching unit of claim 1 wherein the digital video signals are
transmitted over a six MHZ NTSC channel.

40 11. The seamless switching unit of claim 1 wherein the seamless switching unit is
implemented in a subscriber reception unit, wherein a personal profile is created and
the subscriber reception unit further comprises a memory for storing the personal
profile, and wherein the first or second video signals are selected based in part on the
45 personal profile.

50 12. The seamless switching unit of claim 1 wherein the seamless switching unit is
implemented in a subscriber reception unit, wherein the subscriber reception unit
comprises a subscriber interface for receiving subscriber selections and wherein the
first or second video signals are selected based on one or more subscriber selections.

5 13. The seamless switching unit of claim 1 wherein the seamless switching unit is
implemented in a subscriber reception unit, wherein the subscriber reception unit
comprises a digital display processor, connected to the output of the digital
demultiplexer/decoder, for receiving and formatting the selected video signals for
10 5 display.

15 14. A seamless switching unit for receiving programming and performing a
seamless switch from a first digital video signal multiplexed in a first program signal
received in a first RF channel to a second digital video signal multiplexed in a second
program signal received in a second RF channel, comprising:

10 a microprocessor, the microprocessor selecting the signals for display;

20 a first tuner, connected to the microprocessor, for tuning to the first RF
channel, wherein the first tuner selects the first RF channel on command from the
microprocessor;

25 a first digital demodulator, connected to the first tuner, for demodulating the
15 first program signal;

30 a digital demultiplexer/decoder, connected to the first digital demodulator and
microprocessor, for demultiplexing the first program signal to obtain the first digital
video signal, containing a buffer for buffering the first digital video signal, and for
decompressing the first digital video signal;

20 a second tuner, connected to the microprocessor, the second tuner pre-tuning
35 to the second RF channel, wherein the second tuner selects the second RF channel on
command from the microprocessor;

40 a second digital demodulator, connected to the second tuner, for demodulating
the second program signal;

25 wherein, upon command from the microprocessor to switch to the second
digital video signal, the digital demultiplexer/decoder searches for the splice point of
the first digital video signal and upon recognition of the splice point, loads the second
45 digital video signal into the buffer as the first digital video signal continues to play out
upon command from the microprocessor, and wherein the switch from the first digital
30 video signal to the second digital video signal is seamless in that the video stream
switching does not produce visible artifacts.

5 15. A seamless switching unit for receiving programming and capable of performing seamless switches from either a first analog signal to a second analog signal, an analog signal to a digital signal, or a first digital video signal to a second digital video signal, comprising:

10 5 a microprocessor, for selecting one of the video signals and directing a seamless switch to the selected video signal;

15 a pair of tuners, connected to the microprocessor, for tuning to RF channels, wherein the pair of tuners selects the RF channels on command from the microprocessor;

20 10 a pair of analog demodulators, each analog demodulator connected to one of the tuners, and capable of receiving one analog signal;

20 a pair of digital demodulators, each digital demodulator connected to one of the tuners, and capable of receiving one digital signal;

25 15 a digital demultiplexer/decoder, connected to the pair of digital demodulators, for demultiplexing digital signals, decompressing the digital signals, and for performing a seamless switch from one digital video signal to another digital video signal;

30 20 a digital display processor, connected to the output of the digital demultiplexer/decoder, for converting the decompressed output digital signal to an analog signal; and

35 a vertical blanking interval switch, operably connected to the output of the digital demultiplexer/decoder and the output of the analog demodulator, for seamlessly switching between the analog video signals.

40 25 16. A seamless switching unit for receiving programming and performing a seamless switch from a digital video signal multiplexed in a first program signal received in a first RF channel to an analog video signal multiplexed in a second program signal received in a second RF channel, comprising:

45 a microprocessor, the microprocessor directing the switch from the digital video signal to the analog video signal;

50 30 a first tuner, connected to the microprocessor, for tuning to the first RF channel;

5 a digital demodulator, connected to the first tuner, for demodulating the first program signal;

10 a digital demultiplexer/decoder, connected to the first digital demodulator and microprocessor, for demultiplexing the first program signal to obtain the digital video signal, and decompressing and decoding the digital signal;

15 a digital display processor, connected to the digital demultiplexer/decoder, for converting the digital video signal to analog;

20 a second tuner, connected to the microprocessor, the second tuner pre-tuning to the second RF channel;

25 an analog demodulator, connected to the second tuner, for receiving and demodulating the analog signal;

30 a vertical blanking interval switch, operably connected to the output of the digital/ demultiplexer decoder and the output of the analog demodulator, for seamlessly switching from the converted digital video signal to the analog video signal during the vertical blanking interval of the signals.

35 17. A method of performing a seamless switch between two digital video streams in a digital reception unit, the digital reception unit containing a microprocessor and a video decoder, comprising the steps of:

40 20 receiving first and second digital video streams, each stream containing video splice points and time gaps;

35 buffering the first digital video stream in a video buffer;

45 receiving a command from a microprocessor to switch to the second digital video stream;

50 25 searching for the splice point of the first digital video stream;

55 loading the second digital video stream frames into the buffer as the first video signal stream continues to play out and be displayed; and

30 wherein the switch from the first digital video stream to the second digital video stream is seamless in that the video stream switching does not produce visible artifacts.

5 18. A method for preparing a plurality of digital signals at a central location for
seamless switching at subscriber reception sites, comprising the steps of:
receiving a plurality of video signals at the central location;
10 genlocking the plurality of video signals, wherein genlocking creates time
5 synchronized video signals;
directing the plurality of video signals into one or more video encoders;
inserting splice points into the plurality of video signals;
15 time synchronizing the plurality of video encoders, thereby ensuring that the
splice points inserted in the video occur at a correct frame number;
10 digitally compressing the plurality of digital video signals in the video
encoders, forming a digital program stream, wherein the digital video signals are
20 encoded at a lower bit rate than channel capacity resulting in creation of certain time
gaps in each of the video signals;
wherein program switching from one video signal to another video signal at
25 the subscriber reception sites is made seamless through the creation of the time gaps,
15 the time gaps representing switch times thereby allowing time for a seamless switch
from one of the video signals to another video signal.

30 19. The method of claim 18 wherein a plurality of digital program streams are
created, and further comprising the step of multiplexing the plurality of digital
20 program streams.

35 20. The method of claim 18 wherein a plurality of audio signals are associated
with the plurality of video signals and further comprising the steps of receiving the
40 plurality of audio signals, encoding the plurality of received audio signals and
compressing the plurality of audio signals.

25 21. The method of claim 18 wherein the encoder receives a plurality of data
45 computer codes and further comprising the step of encoding the received plurality of
data computer codes with the plurality of video signals.

5 22. A digital encoding system for preparing a plurality of digital signals at a central location for seamless switching at subscriber reception sites, comprising:

10 at least one video genlock device, for receiving the plurality of video signals and creating time synchronized video signals;

5 at least one video encoder, connected to the video genlock device, for inserting splice points into the plurality of video signals, and encoding and compressing the plurality of video signals to form a digital program stream, wherein the video encoders are time synchronized;

15 wherein the digital video signals are encoded at a lower bit rate than channel capacity resulting in creation of certain time gaps in each of the video signals, the time gaps representing switch times thereby allowing time for a seamless switch from one of the video signals to another video signal.

20 23. The digital encoding system of claim 22 wherein a plurality of digital program streams are created and further comprising a multiplexer for multiplexing the plurality of digital program streams.

25 24. The digital encoding system of claim 22 further comprising a transmitter for transmitting the plurality of digital program streams onto a subscriber distribution network selected from the group consisting of cable television, broadcast television, and direct broadcast satellite.

30 25. The digital encoding system of claim 22 wherein a plurality of audio signals are associated with the plurality of video signals and the encoder receives the plurality of audio signals and encodes and decompresses the plurality of audio signals.

35 26. The digital encoding system of claim 22 wherein the encoder receives a plurality of data computer codes and encodes the data computer codes with the plurality of video signals.

40 27. The digital encoding system of claim 23 wherein at least one of the video signals comprises a regular television program signal.

5 28. The digital encoding system of claim 22 wherein the at least two of the video signals comprises interactive program signals of an interactive program.

10 29. The digital encoding system of claim 22 wherein the plurality of video signals comprise one or more advertisements.

15 30. The digital encoding system of claim 22 further comprising a transmitter and wherein the transmitter transmits programming to a subscriber distribution network selected from the group consisting of cable television, broadcast television, and direct broadcast satellite.

20 31. The digital encoding system of claim 22 wherein at least two of the plurality of video signals comprise different camera angles of the same event.

25 32. The digital encoding system of claim 22 wherein at least one of the digital video signals contains a close-up view of an event.

30 33. The digital encoding system of claim 22 wherein the digital program stream is transmitted onto a single cable channel.

35 34. A system for switching from a first group of signals to a second group of signals, comprising:

a command terminal, the command terminal inserting an analog tone in the first group of signals;

40 a real time encoder, in communications with the command terminal, for inserting a digital tone in the first group of signals upon detection of the analog tone;

20 a server, in communications with the real time encoder, for receiving the first group of signals and a second group of signals;

45 a control terminal, in communications with the server, for sending a switch command to the server; and

WO 00/16544

5 wherein upon receipt of the switch command, the server begins to look for the digital tone, and upon detecting the digital tone, the server switches from the first group of signals to a second group of signals in a seamless manner.

10 35. The system of claim 34 wherein the first group of signals represent signals from a live event.

15 36. The system of claim 34 wherein the second group of signals comprise prerecorded content and further comprising a memory for storing the second group of signals.

20 37. The system of claim 34 wherein the second group of signals comprise alternative advertisements and further comprising a memory for storing the second group of signals.

25 38. The system of claim 34 wherein the first and second group of signals are in the MPEG encoded format.

30 39. The seamless switching unit of claims 1, 14, or 15, wherein the seamless switching unit is located at a broadcast station and further comprises a means for transmitting the signals to remote sites.

35 40. The seamless switching unit of claims 1 or 14, wherein the first and second digital video signals contain non-related programs.

40 41. The seamless switching unit of claim 16, wherein the digital video signal and the analog video signal contain non-related programs.

45 42. The seamless switching unit of claim 1 or 14, wherein the first and second digital video signals contain shopping programs directed at the sale of goods or services.

WO 00/16544

5 43. The seamless switching unit of claims 1 or 14, wherein the seamless switching
unit is integrated into a remote reception unit, and the first and second digital video
10 signals contain shopping programs directed at the sale of goods or services, wherein
the seamless switching unit further comprises a means for transmitting user selections
5 of purchases back to a central location.

15 44. The seamless switching unit of claims 1, 14 or 15, wherein the seamless
switching unit is located at a central location, wherein at least one of the signals
20 represents an advertisement, and further comprising a memory for storing the signal
containing the advertisement.

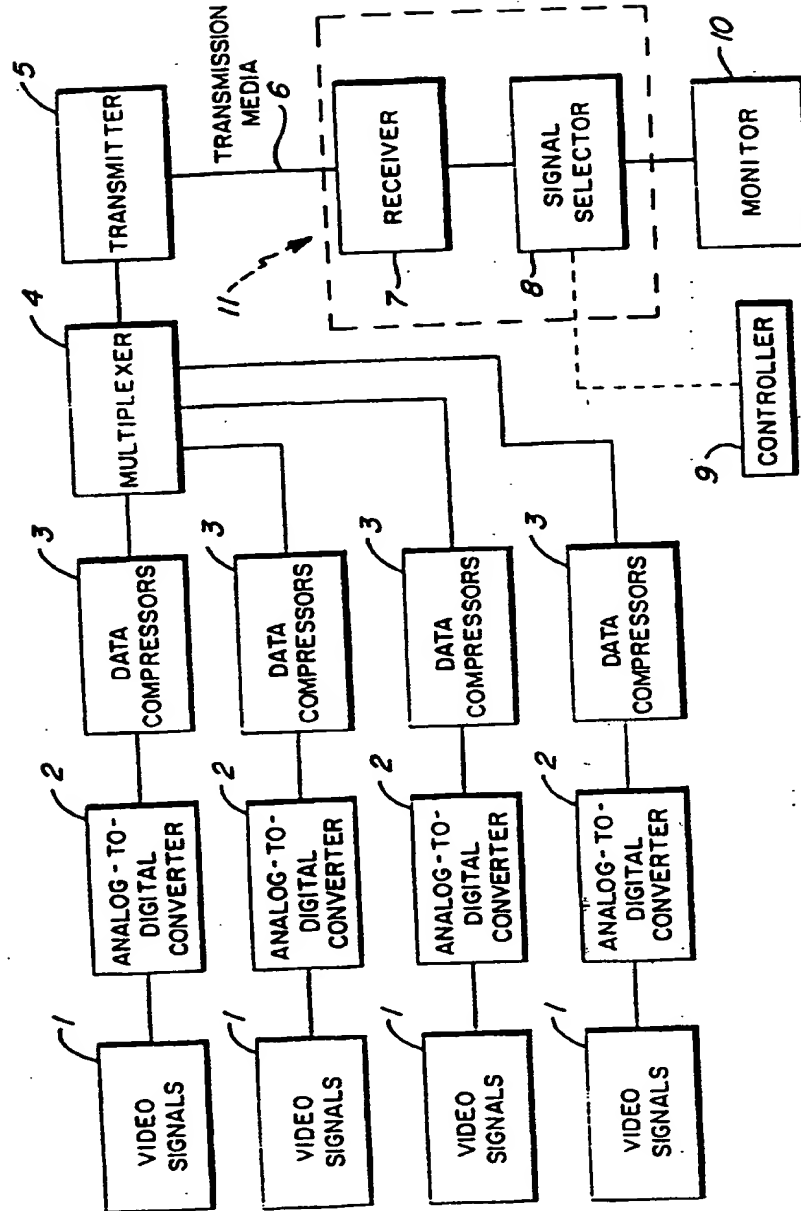


Fig. 1

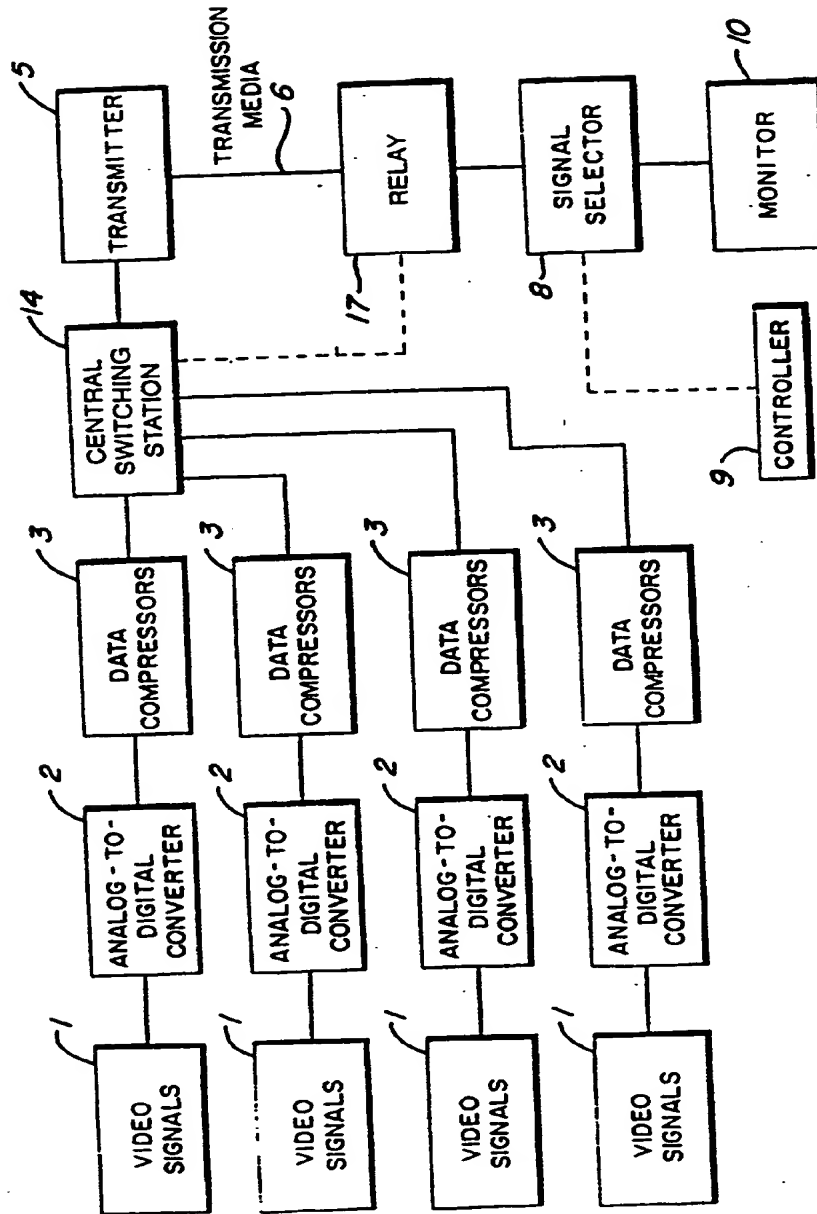


Fig. 2

3/17

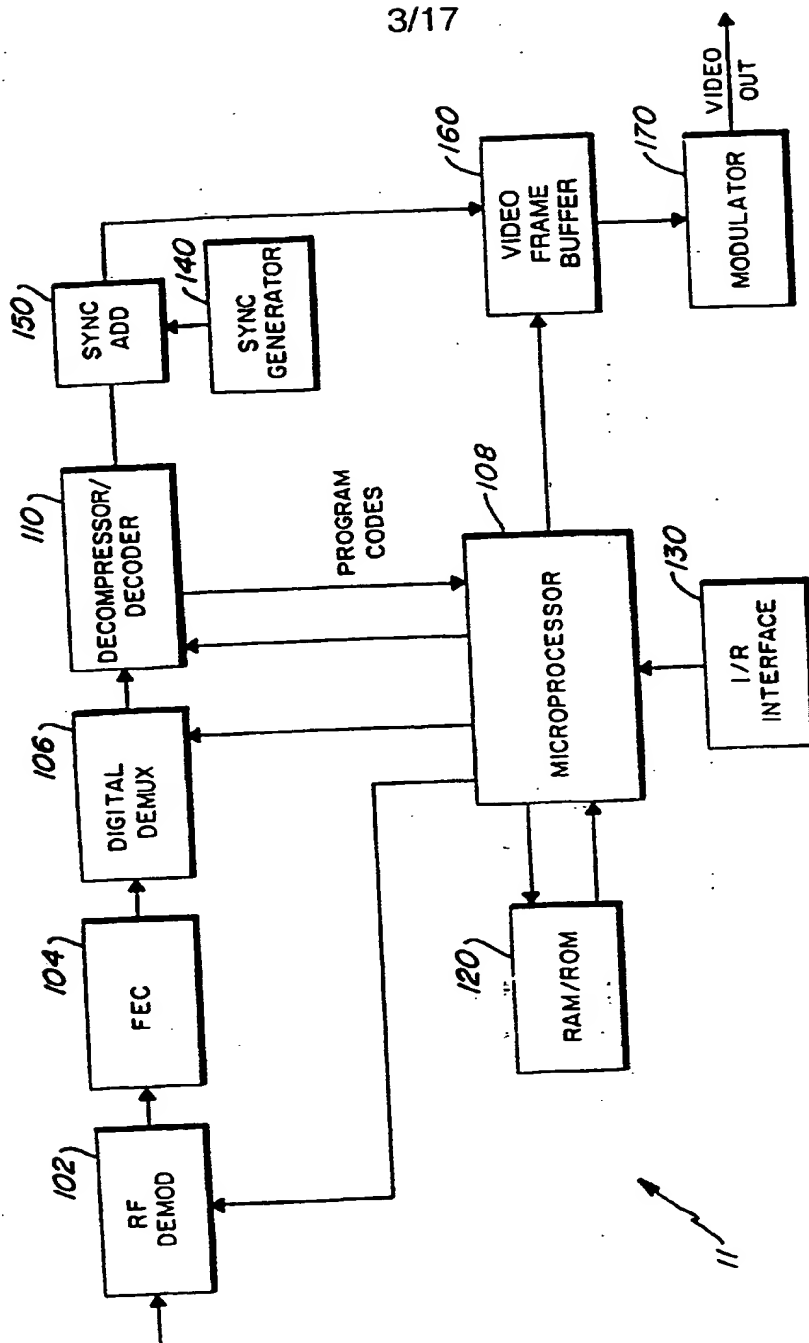


Fig. 3

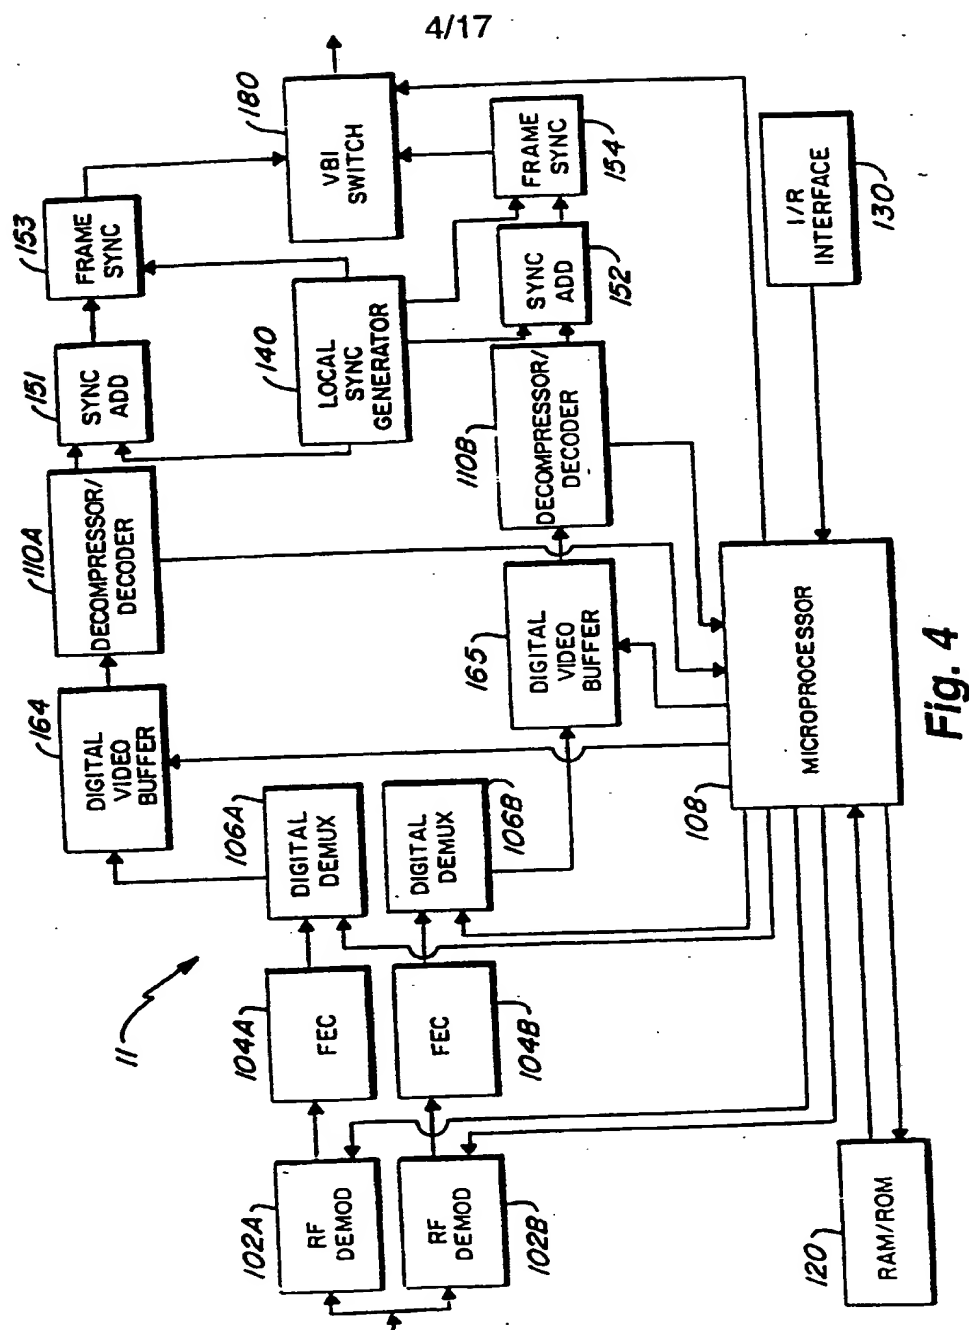
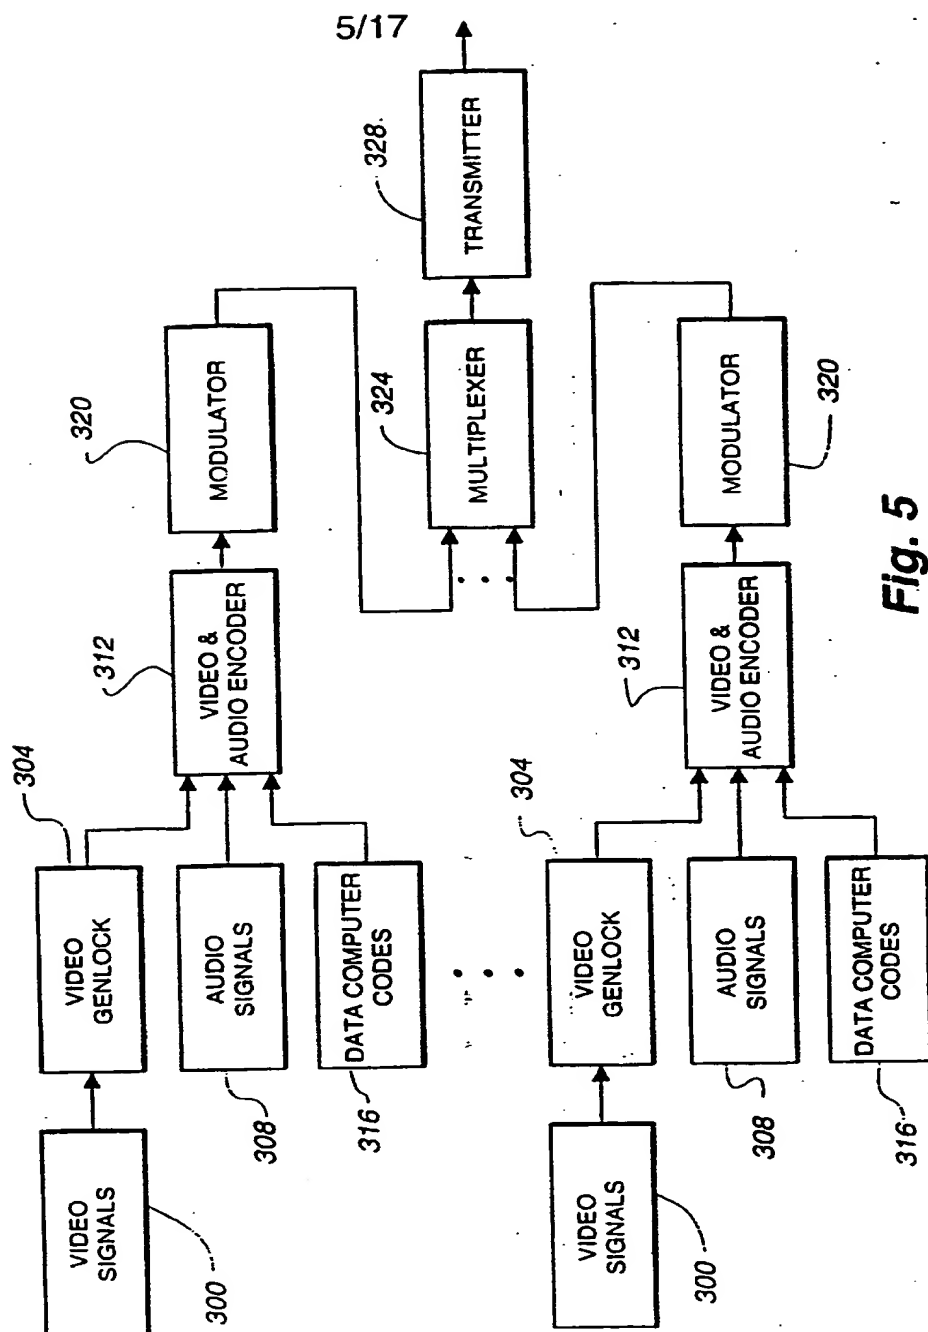


Fig. 4



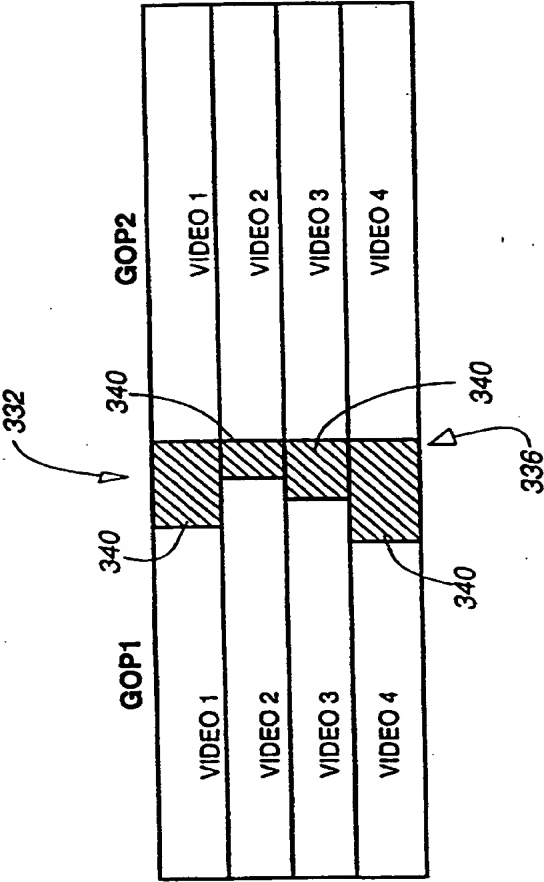


Fig. 6

7/17

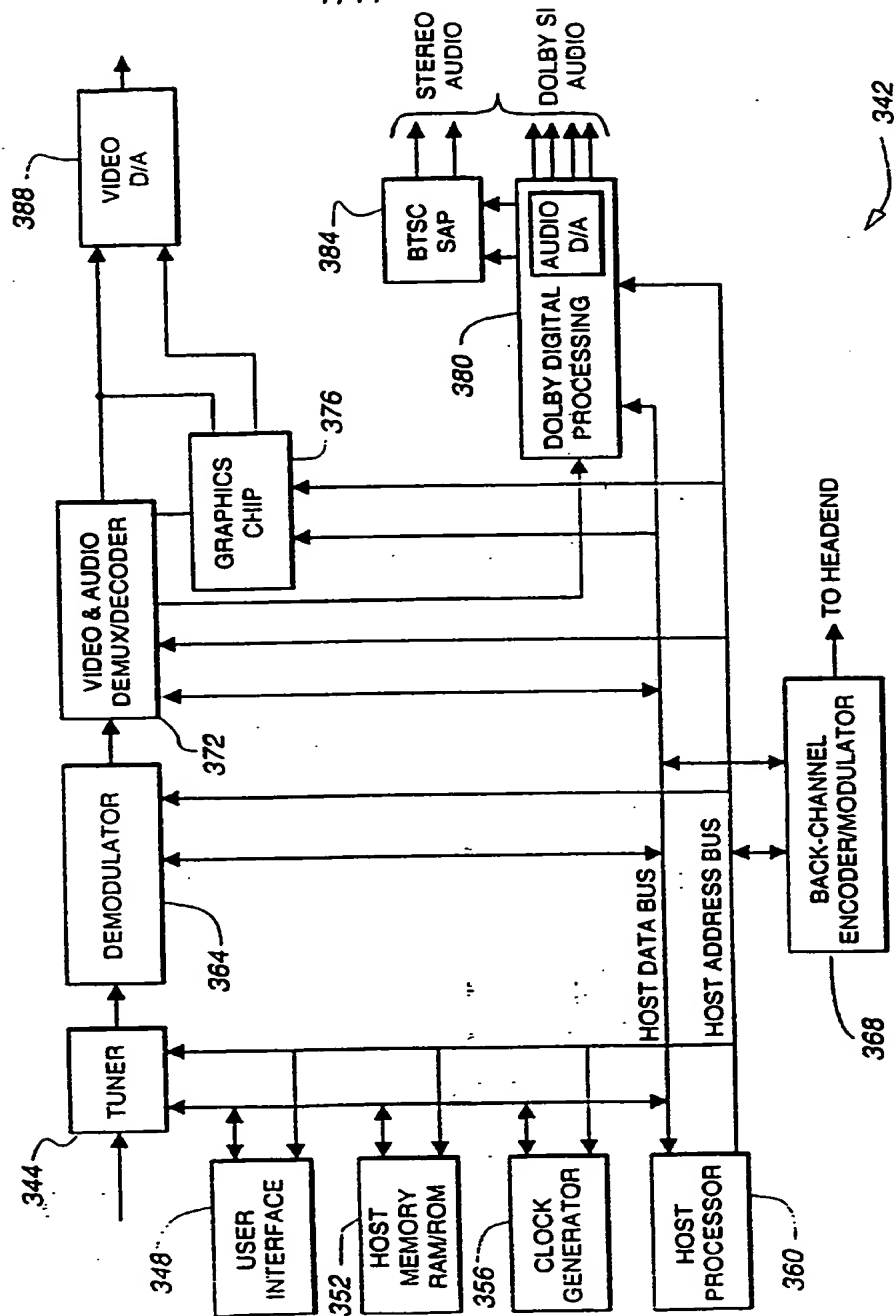


Fig. 7

8/17

392

AUDIO 1	1	2	3	4	5	6	7	8	9	10
AUDIO 2	1	2	3	4	X	6	7	8	9	10
AUDIO 3	1	2	3	4	X	6	7	8	9	10
AUDIO 4	1	2	3	4	X	6	7	8	9	10

TRANSPORT PACKET
JITTER TIME

Fig. 8

9/17

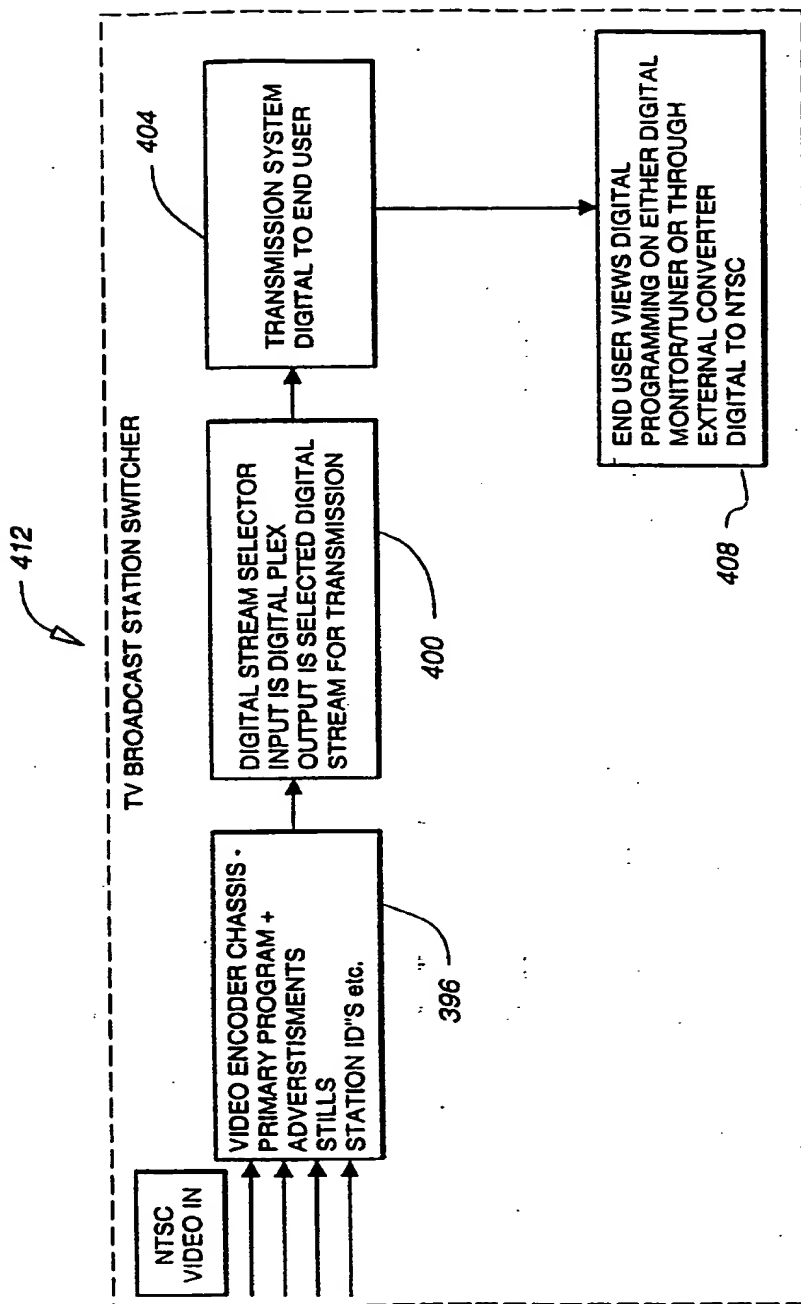


Fig. 9

10/17


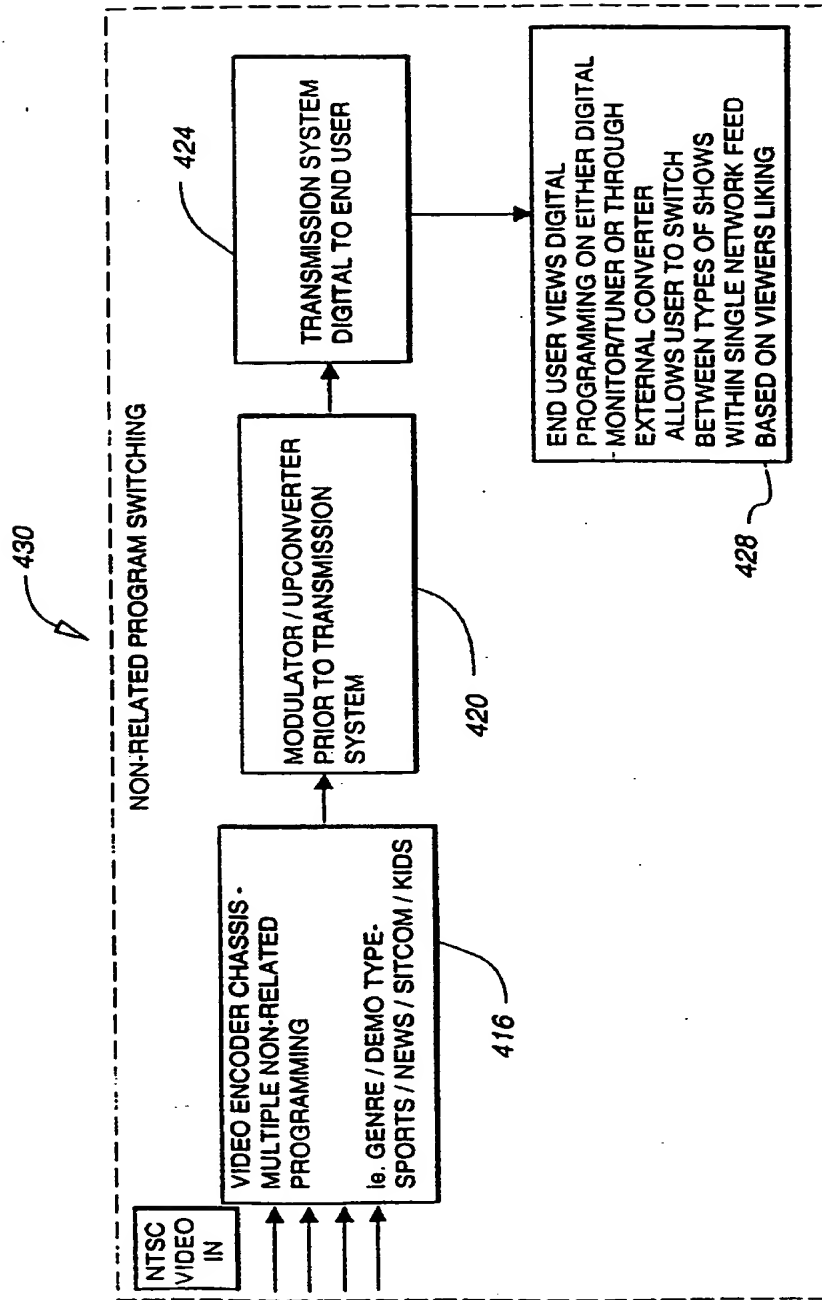



Fig. 10

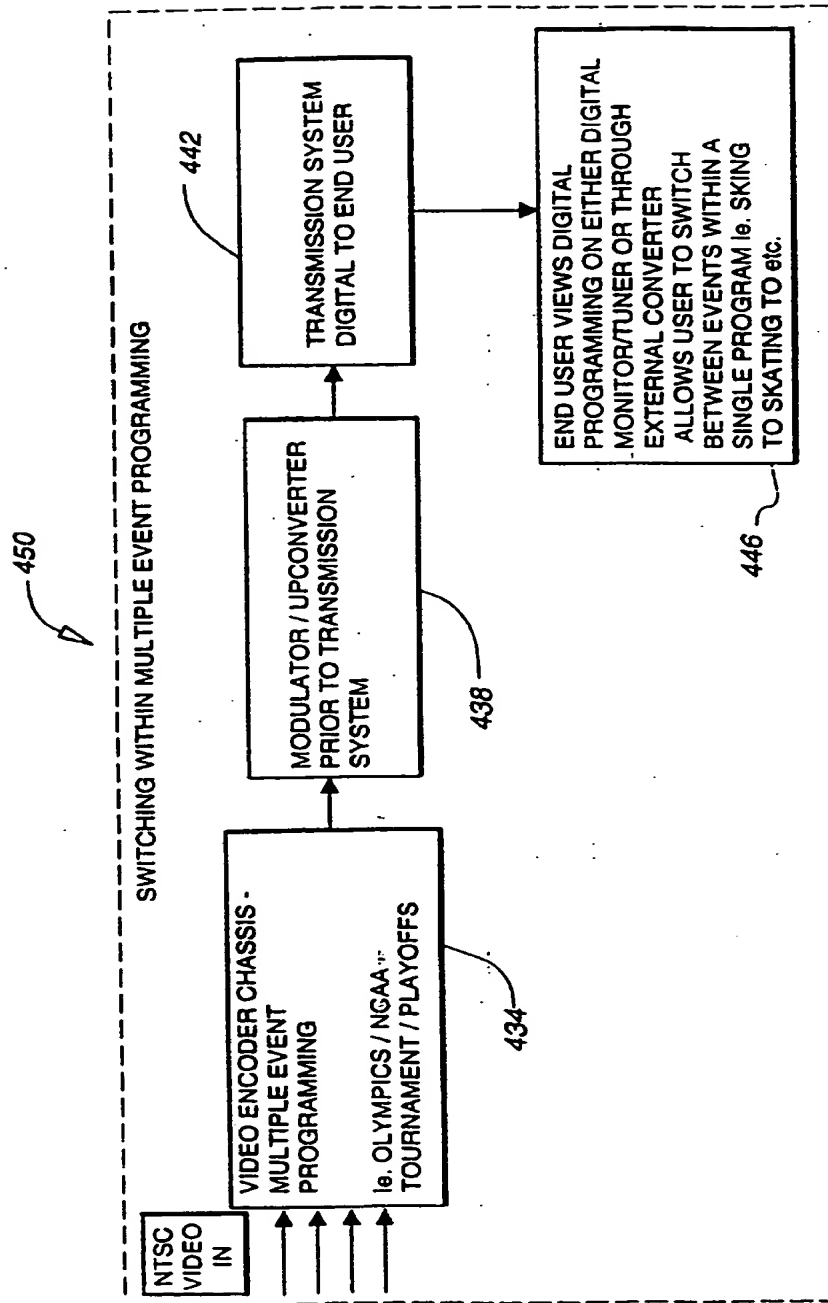

SUBSTITUTE SHEET (RULE 26)

Fig. 11

12/17

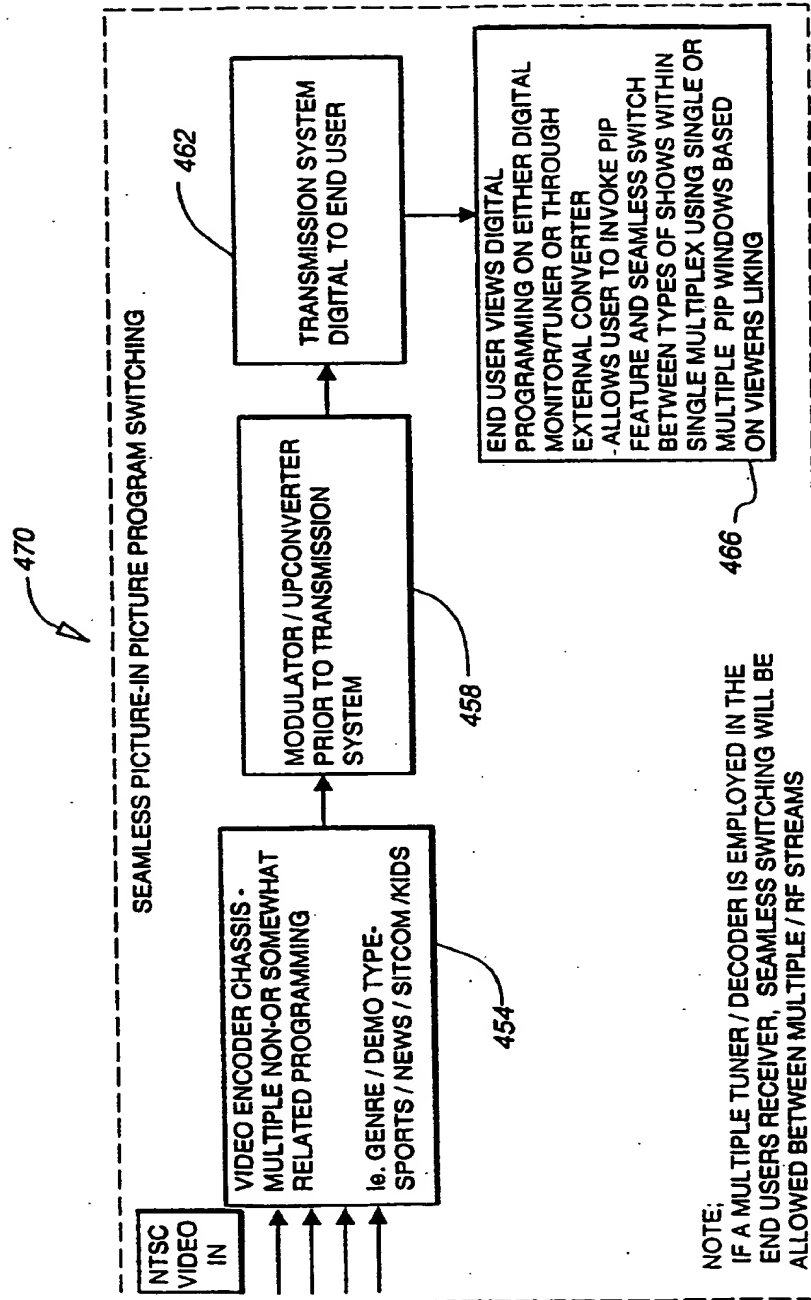

SUBSTITUTE SHEET (RULE 26)

Fig. 12

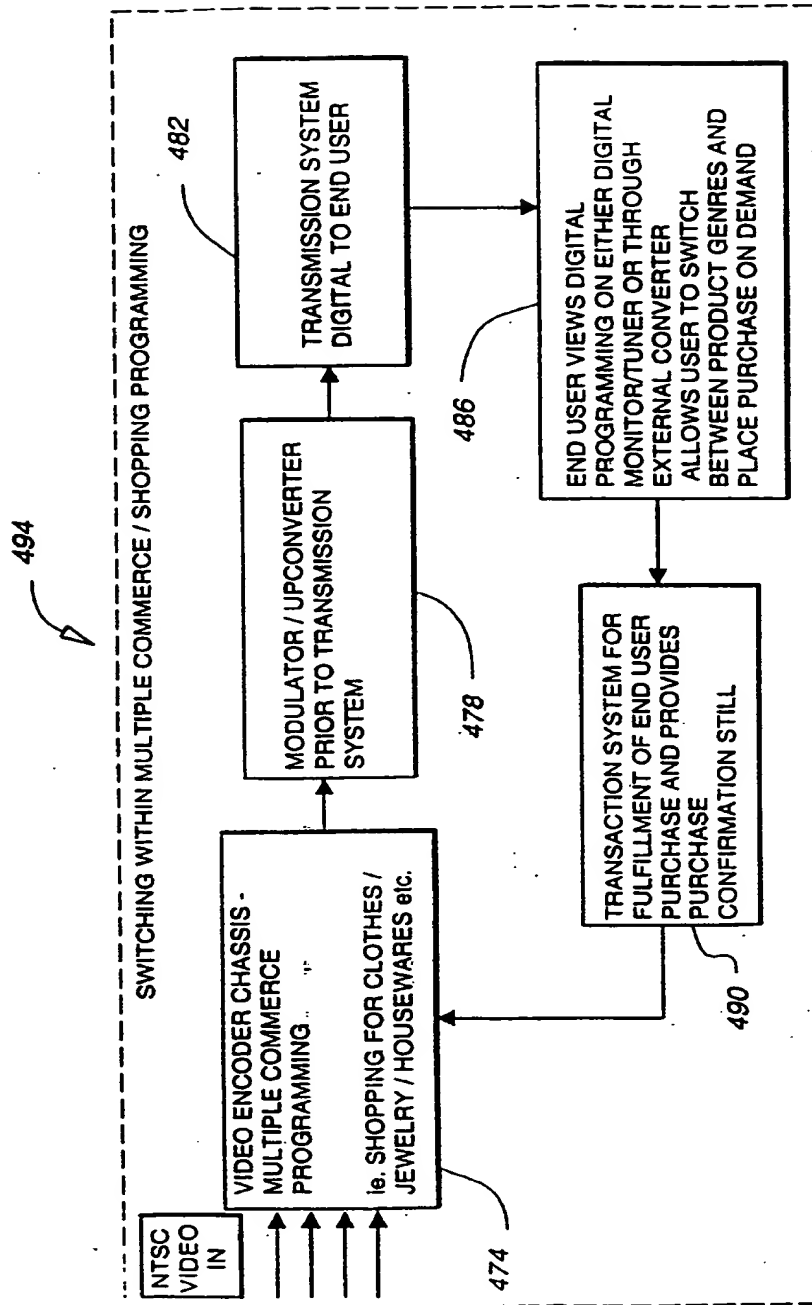


Fig. 13

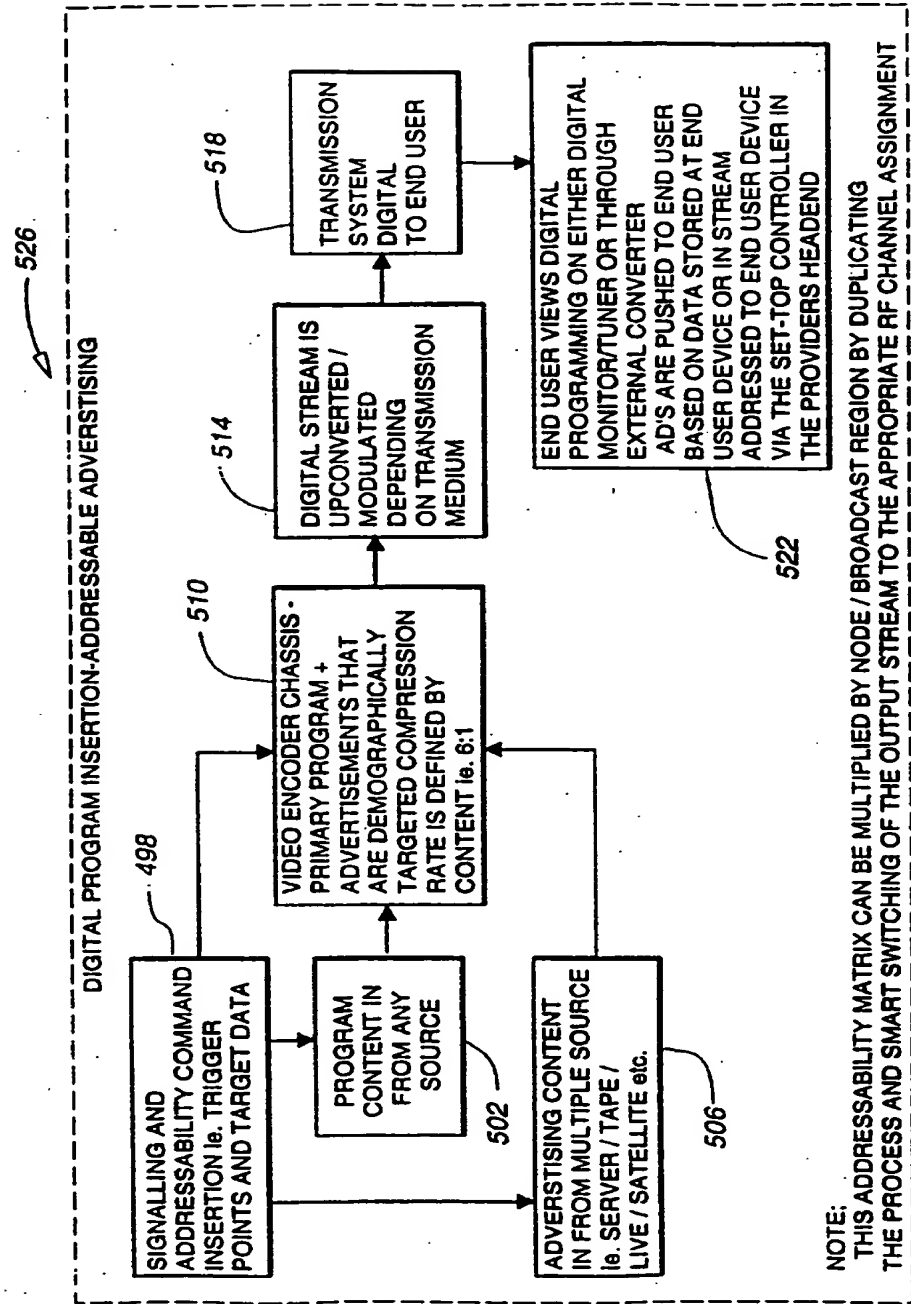


Fig. 14

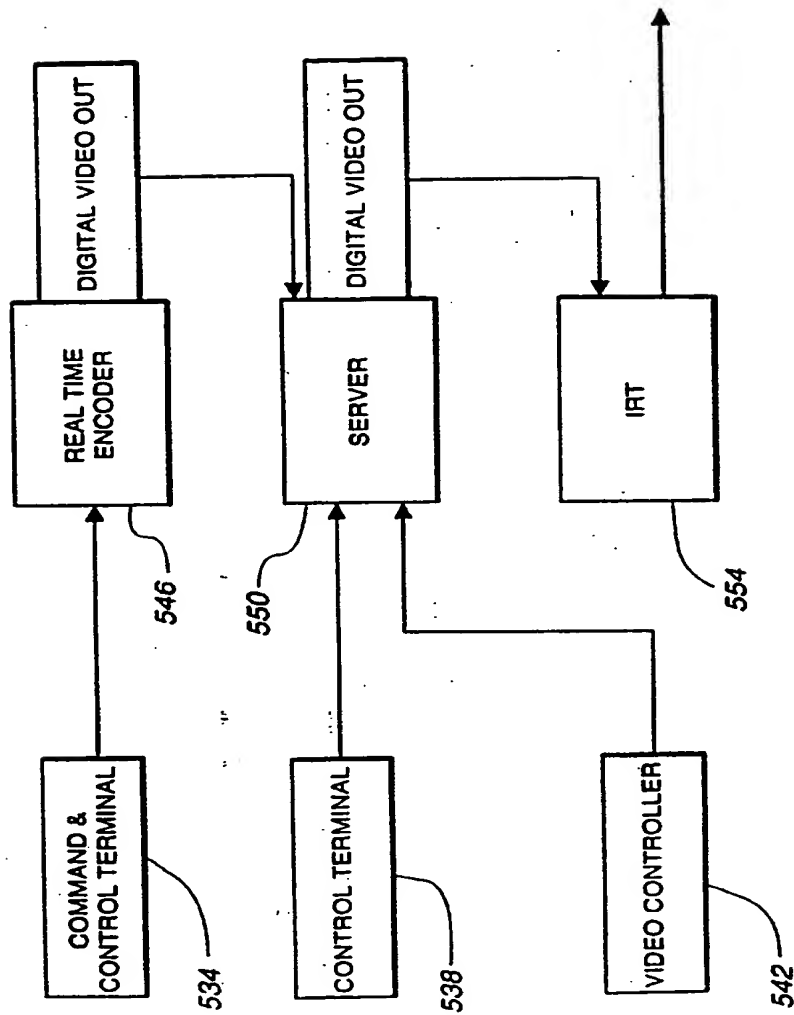


Fig. 15

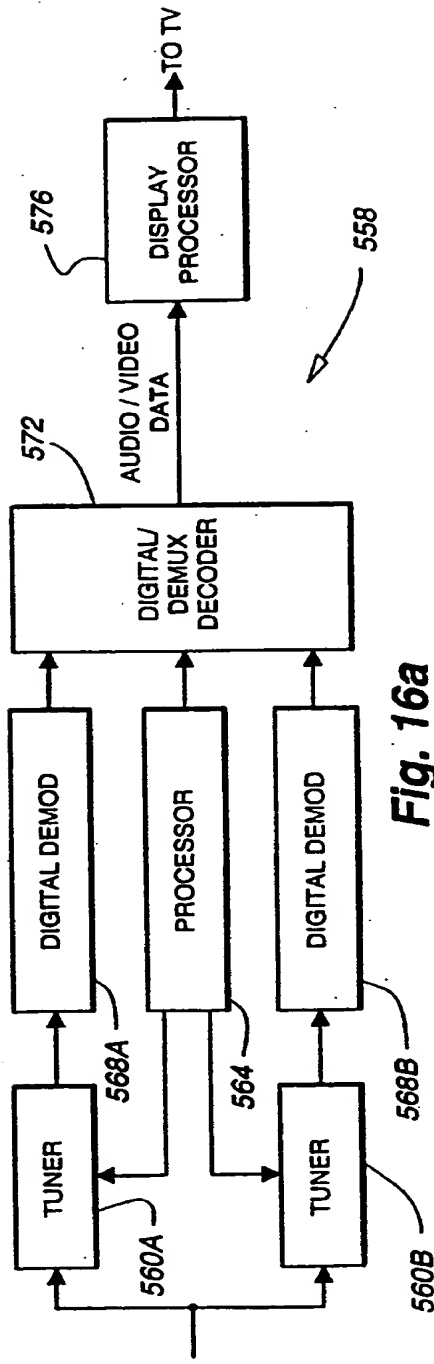


Fig. 16a

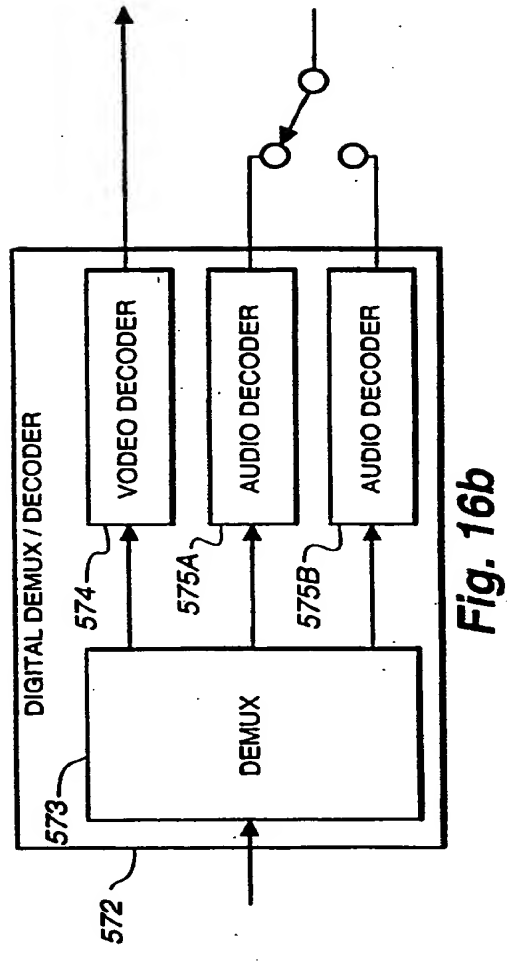


Fig. 16b

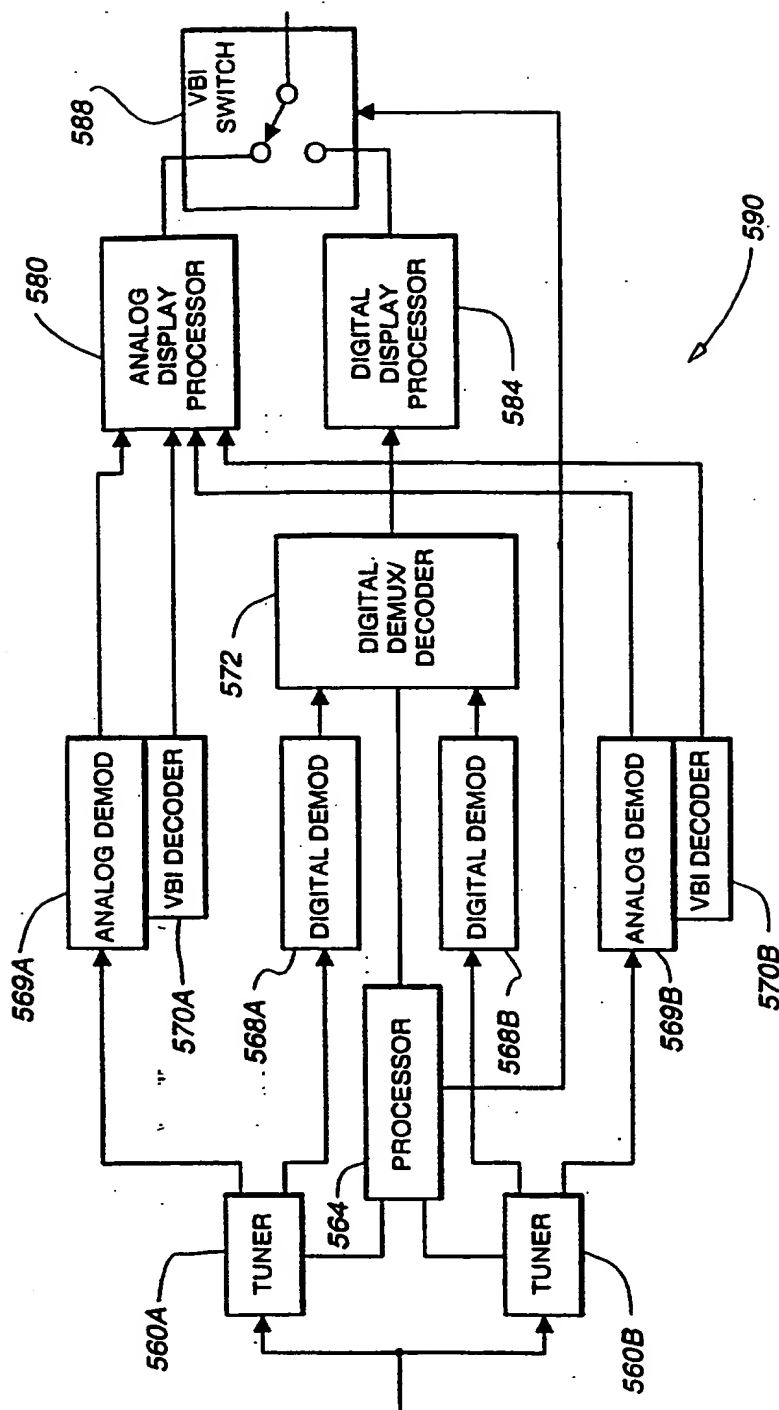


Fig. 17